

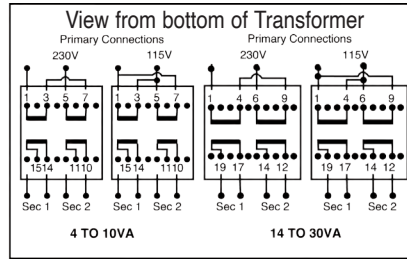


PCB TRANSFORMERS

Flat Pack Transformers

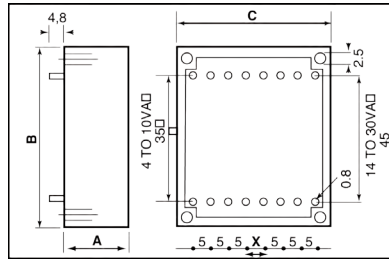

Series Parallel Connections



4VA		6VA		10VA		14VA		18VA		24VA		30VA	
Code	Volts	Code	Volts	Code	Volts	Code	Volts	Code	Volts	Code	Volts	Code	Volts
FP4272	2 x 7,2	FP6272	2 x 7,2	FP10272	2 x 7,2	FP14272	2 x 7,2	FP18272	2 x 7,2	FP24272	2 x 7,2	FP30272	2 x 7,2
FP4209	2 x 9,0	FP6209	2 x 9,0	FP10209	2 x 9,0	FP14209	2 x 9,0	FP18209	2 x 9,0	FP24209	2 x 9,0	FP30209	2 x 9,0
FP4212	2 x 12	FP6212	2 x 12	FP10212	2 x 12	FP14212	2 x 12	FP18212	2 x 12	FP24212	2 x 12	FP30212	2 x 12
FP4215	2 x 15	FP6215	2 x 15	FP10215	2 x 15	FP14215	2 x 15	FP18215	2 x 15	FP24215	2 x 15	FP30215	2 x 15
FP4218	2 x 18	FP6218	2 x 18	FP10218	2 x 18	FP14218	2 x 18	FP18218	2 x 18	FP24218	2 x 18	FP30218	2 x 18
FP4224	2 x 24	FP6224	2 x 24	FP10224	2 x 24	FP14224	2 x 24	FP18224	2 x 24	FP24224	2 x 24	FP30224	2 x 24
A=19	B=53	A=23	B=53	A=29	B=53	A=25	B=68	A=29	B=68	A=32	B=68	A=36	B=68
C=44	X=5	C=44	X=5	C=44	X=5	C=57	X=6	C=57	X=6	C=57	X=6	C=57	X=6

*For more technical information contact your nearest AC/DC branch or distributor

Type 30 - 1,5 VA	Code	Secondary Voltage (V)	Secondary Current (MA)	Off-load Voltage (V)	PIN Configuration Top View
<p>Eff.: 66% Temp. rise 21 °C</p>	P01172	7,2	200	10,5	
	P01272	2 x 7,2	2 x 100	2 x 10,9	
	P01195	9,5	150	14,1	
	P01295	2 x 9,5	2 x 75	2 x 14,1	
	P01112	12,0	125	17,6	
	P01212	2 x 12,0	2 x 62	2 x 17,1	
	P01115	15,0	100	22,9	
	P01215	2 x 15,0	2 x 50	2 x 22,2	
	P01117	17,5	85	26,2	
	P01217	2 x 17,5	2 x 42	2 x 25,9	
P01124	24,0	62	34,8		
P01224	2 x 24,0	2 x 31	2 x 34,5		
<p>Eff.: 60% Temp. rise 24 °C</p>	P02172	7,2	275		8,4
	P02272	2 x 7,2	2 x 137		2 x 8,4
	P02195	9,5	200		11,2
	P02295	2 x 9,5	2 x 100		2 x 11,1
	P02112	12,0	170		14,4
	P02212	2 x 12,0	2 x 85		2 x 14,1
	P02115	15,0	130		17,9
	P02215	2 x 15,0	2 x 65		2 x 17,1
	P02117	17,5	115	20,8	
	P02217	2 x 17,5	2 x 55	2 x 20,2	
P02124	24,0	83	28,7		
P02224	2 x 24,0	2 x 40	2 x 28,8		
<p>Eff.: 67% Temp. rise ±28 °C</p>	P03172	7,2	415		8,6
	P03272	2 x 7,2	2 x 208		2 x 8,7
	P03195	9,5	330		11,3
	P03295	2 x 9,5	2 x 165		2 x 11,3
	P03112	12,0	250		14,4
	P03212	2 x 12,0	2 x 125		2 x 13,9
	P03115	15,0	200		17,9
	P03215	2 x 15,0	2 x 100		2 x 18
	P03117	17,5	170	21,4	
	P03217	2 x 17,5	2 x 85	2 x 21,2	
P03124	24,0	125	28,5		
P03224	2 x 24,0	2 x 60	2 x 28,5		