


POWER TRANSFORMERS SINGLE PHASE

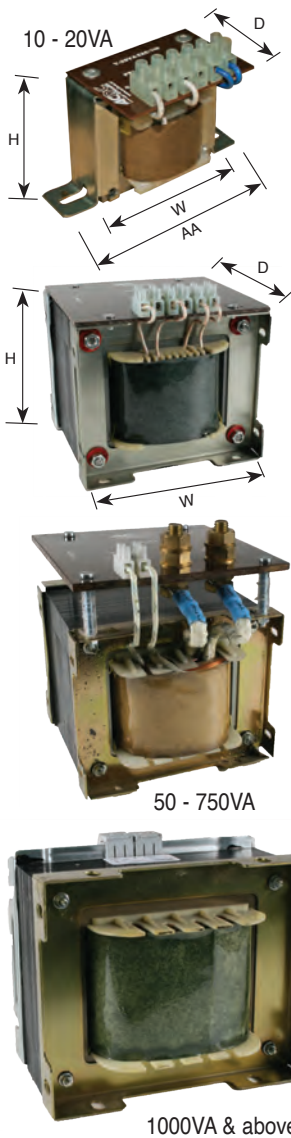

Standard Voltages


230/12V	400/24V	525/24V
230/24V	400/48V	525/110V
230/48V	400/110V	525/230V
230/110V	400/230V	
230/230V		

ex stock 20-600VA

Single Phase-Open Type Double Wound

VA Rating Code	Dimensions (mm)				Weight kg
	W	AA	H	D	
T-10VA	60	100	65	60	0.4
T-20VA	80	80	85	85	1.1
T-25VA	80	75	80	80	1
T-30VA	80	80	80	80	1,1
T-40VA	85	90	75	75	1.5
T-50VA	85	85	90	90	1.5
T-75VA	100	90	95	95	2.2
T-100VA	100	95	90	90	2.2
T-125VA	105	100	105	105	2.9
T-150VA	105	100	105	105	2.9
T-175VA	120	120	90	90	3.3
T-200VA	105	115	95	95	3.6
T-225VA	120	120	90	90	4
T-250VA	105	105	115	115	3.8
T-300VA	125	115	110	110	5
T-350VA	125	120	115	115	5.1
T-400VA	138	135	110	110	5.8
T-500VA	160	135	140	140	8.3
T-600VA	150	150	150	150	8.5
T-650VA	138	135	140	140	8.5
T-750VA	140	140	150	150	10.2
T-1000VA	190	190	150	150	15
T-1500VA	190	190	165	165	17.2
T-2000VA	210	220	150	150	15
T-2500VA	190	190	170	170	17
T-3000VA	190	190	180	180	20
T-4000VA	210	210	190	190	24
T-5000VA	230	240	210	210	29
T-6500VA	260	260	220	220	36
T-7500VA	270	270	230	230	43
T-10000VA	270	270	250	250	50
T-15000VA	340	350	260	260	55

Standard Multitaps

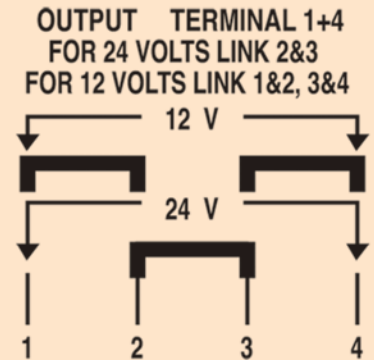

Typical series/parallel connections

VA Rating	Codes	
	Pri: 0-230-400V Sec: 12-24V Terms: 0-12 0-12	Pri: 0-400-525V Sec: 115-230V Terms: 0-115 0-115
25VA	T-25VA M1	*T-25VA M2
50VA	T-50VA M1	*T-50VA M2
100VA	T-100VA M1	*T-100VA M2
150VA	T-150VA M1	*T-150VA M2
200VA	T-200VA M1	*T-200VA M2
300VA	T-300VA M1	*T-300VA M2
500VA	T-500VA M1	*T-500VA M2

NOTE:

ALL VA RATINGS
ARE AT AMBIENT
TEMPERATURE 25°C

NB. ALL PRICES UP TO 1000V ONLY

- Autowound Transformers and other voltages manufactured to your order.
- Isolation Transformers include earth screen and terminal and are available in all the above sizes.

DIN TRANSFORMERS



All above power transformers from 25-150VA can be supplied for direct mounting onto 35mm DIN Rail. To order, add prefix D. Example DT-100VA M1.

Optional Extras

Code	Description	Transformer Size
T-EX1	Extra Tapping	Under 25A
T-EX2	Extra Tapping	25-50A
T-EX3	Extra Tapping	Above 50A
T-FS1	Extra Fuse on Primary 1000V (10 x 85)	Up to 16A
T-PER1	Perspex Terminal Shield	Up to 200VA
T-PER2	Perspex Terminal Shield	225VA to 1kVA
T-PER3	Perspex Terminal Shield	1.5-20kVA
T-SCN1	Earth Screen & Terminal	Up to 200VA
T-SCN2	Earth Screen & Terminal	225VA to 1kVA
T-SCN3	Earth Screen & Terminal	1.5-20kVA