

Product SPECIFICATION SHEET

zameL

ACDC
DYNAMICS
www.acdc.co.za

LDM-30

DESCRIPTION

The LDM-30 device is used for graphic presentation of the three-phase voltage supply system level. Voltage value is shown by means of a three diode line consisting of 11 LED diodes. The display range is from 195 to 245 V ~ for every phase. The device's system is powered from L1 phase, and its lack causes total device switch off.

FEATURES

- ⤵ Graphic presentation of the three-phase voltage supply system level,
- ⤵ voltage indication wide range from 195 to 245 V~,
- ⤵ voltage value proportional to graph height scale range 5 V,
- ⤵ indication stability,
- ⤵ indicated voltage value accuracy $\pm 2,5$ V,
- ⤵ voltage critical values are signalled by diodes marked „ ≤ 195 V”, „ ≥ 245 V”,
- ⤵ TH-35 DIN rail installation.




CAUTION

The device is designed for three-phase installation and must be installed in accordance with standards valid in a particular country. The device should be connected according to the details included in this operating manual. Installation, connection and control should be carried out by a qualified electrician staff, who act in accordance with the service manual and the device functions. Disassembling of the device is equal with a loss of guarantee and can cause electric shock. Before installation make sure the connection cables are not under voltage. The cruciform head screwdriver 3,5 mm should be used to instal the device. Improper transport, storage, and use of the device influence its wrong functioning. It is not advisable to instal the device in the following cases: if any device part is missing or the device is damaged or deformed. In case of improper functioning of the device contact the producer.

TECHNICAL PARAMETERS

LDM - 30	
Input (supply) terminals:	L1, N
Input rated voltage:	230 V~
Input voltage tolerance:	from -15 to +10 %
Rated frequency:	50 / 60 Hz
Rated power consumption:	68 mA
Measure terminals:	L1, L2, L3
Voltage indicator:	3x11 LED diodes
Voltage indicator accuracy:	$\pm 2,5$ V
Number of terminal clamps:	4
Section of connecting cables:	from 0,2 to 2,5 mm ²
Ambient temperature range:	from -20 to +45 °C
Operating position:	free
Mounting:	TH35 rail (PN-EN 60715)
Protection degree:	IP20 (PN-EN 60529)
Protection class:	II
Overvoltage category:	II
Pollution degree:	2
Impulse voltage:	1 kV (PN-EN 61000-4-5)
Dimensions (height / width / depth):	doublemodular (35 mm) 90x35x66 mm
Weight:	105 g
Reference standards:	PN-EN 60947-5-1, PN-EN 60947-1 PN-EN 61000-4-2,3,4,5,6,11

APPEARANCE

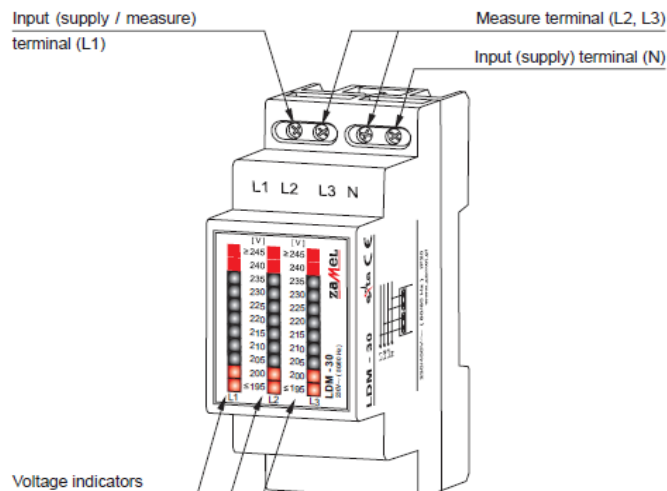

BRANCH CONTACT DETAILS

Johannesburg 010 202 3300
Germiston 011 418 9600
Cape Town 021 510 0710
Pinetown 031 700 4215
Riverhorse 031 492 4800

NATIONAL CALL CENTRE

Sales 010 202 3400
Technical 010 202 3500

www.acdc.co.za


LDM-30

MOUNTING, FUNCTIONING


1. Disconnect the power supply from the mains by the phase fuse, the circuit-breaker or the switch-disconnector that are joined to the proper circuit,
2. Check if there is no voltage on connection cables by means of a special measure equipment,
3. Install LDM-30 device in the switchboard on TH-35 DIN rail,
4. Connect the cables with the terminals according to installing diagram,
5. Switch on the power supply from the mains.

The proper functioning of the device is shown by lighting of the LED diode line. Then its height is proportional to voltage value in the measured phase. If the voltage is higher or equal with 245 V – all diodes are switched on. When the voltage is lower or equal with 195 V only „<195 V” diode is switched on. It is on till the input voltage value drops below 50 V~.


CONNECTING

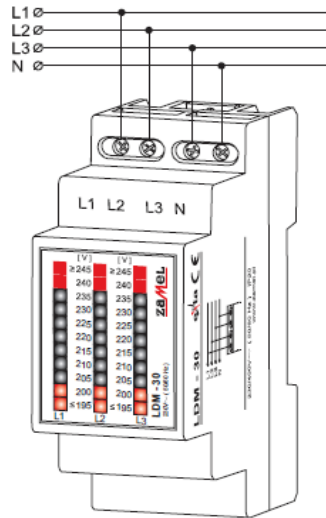


INDICATION DESCRIPTION

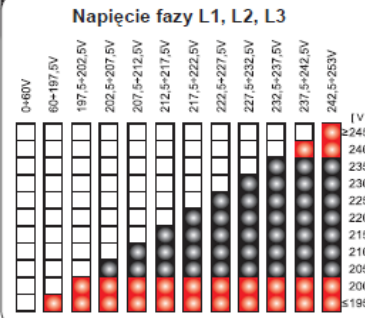


INNER DIAGRAM

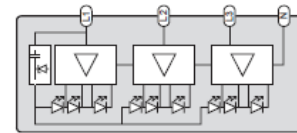

DIMENSIONS

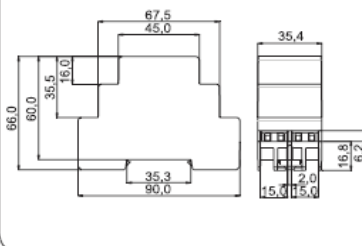

EXAMPLE OF INSTALLATION

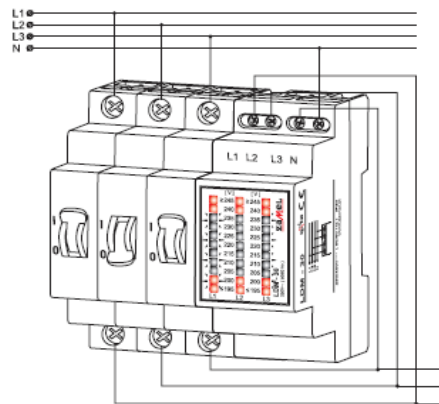

TYPICAL USE:

The LDM-30 three-phase voltage indicator connected to circuit-breaker or switch-disconnector output indicates voltage value of a particular phase.

In the system diode LED lines signal:

- ☞ line L1, L3 – voltage presence on phase wires L1 and L3,
- ☞ line L2 – switched off – no voltage on phase wire L2.

The number of switched on diodes in a line directly indicates the voltage level. Its value can be read from the scale which is next to the diode LED lines. Connecting L1 and N terminals the system can be used in a one-phase installation.

PRODUCT FAMILY

LDM-30 Voltage indicator belongs to LDM voltage indicators family.

LDM - xx

Device type:
10 - one-phase
30 - three-phase

Device symbol

BRANCH CONTACT DETAILS

Johannesburg 010 202 3300
Germiston 011 418 9600
Cape Town 021 510 0710
Pinetown 031 700 4215
Riverhorse 031 492 4800

NATIONAL CALL CENTRE

Sales 010 202 3400
Technical 010 202 3500

www.acdc.co.za