
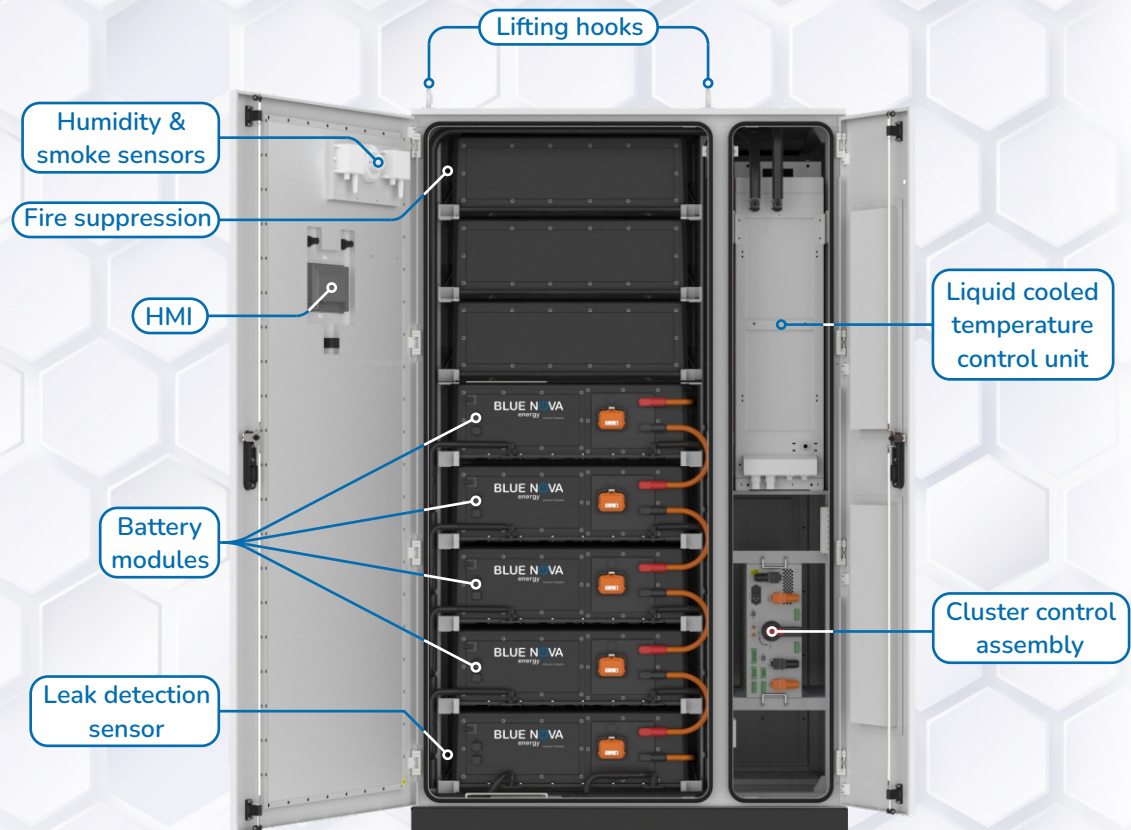


iESS-cab 261k LC

Product Features & Layout

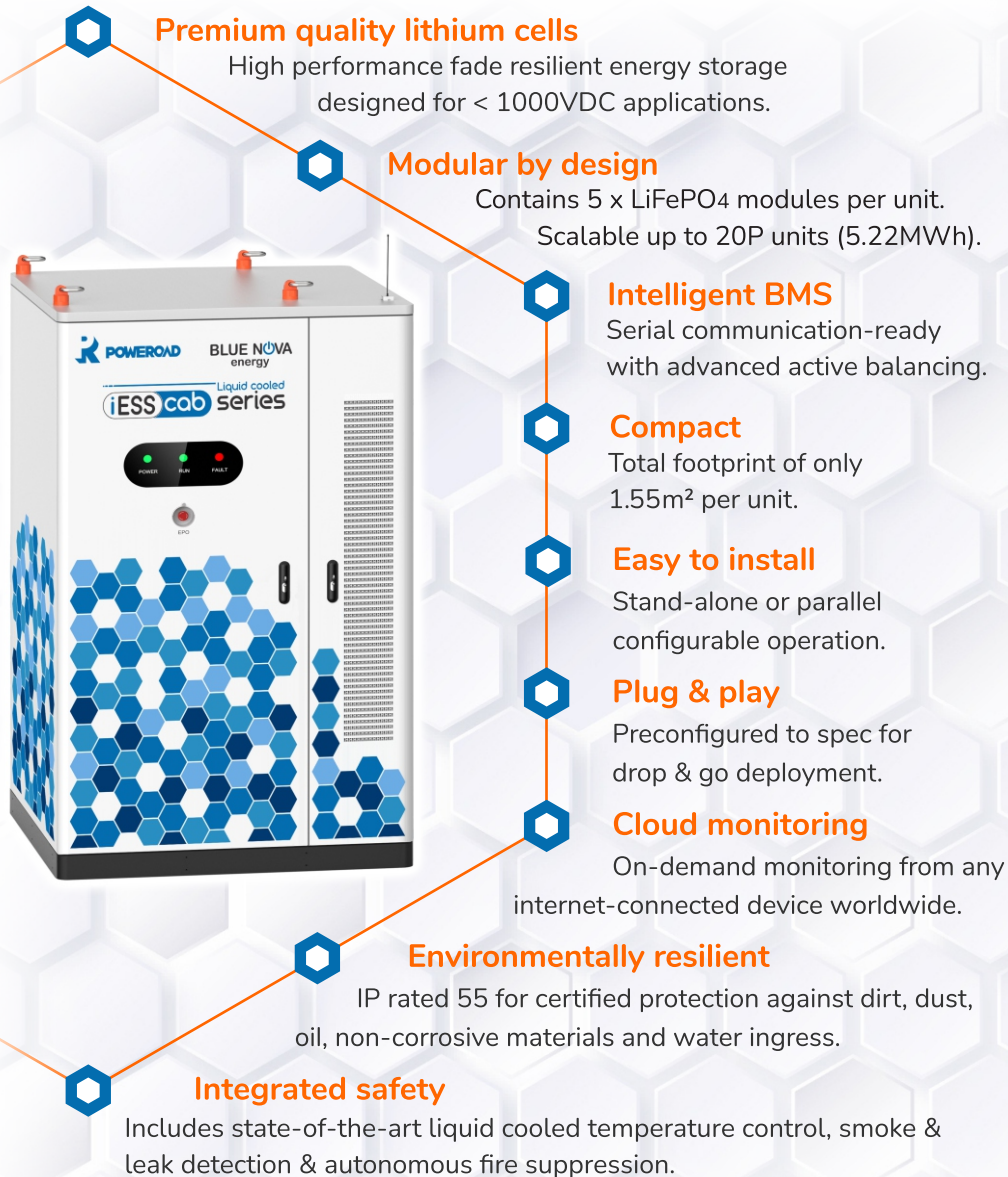

Technical Specifications

iESS-cab 261k LC

DC SPECIFICATIONS

Rated voltage	832V
Maximum charge voltage	936V
Minimum discharge voltage	728V
Rated capacity	261kWh
Rated charge / discharge current	157A
Max. charge / discharge current	157A

GENERAL SPECIFICATIONS

Operating temperature range	-30 ~ 50°C
Storage temperature range	-30 ~ 60°C
Max. altitude	< 2000m
Relative humidity range	5 ~ 95% (non-condensing)
Cooling method	Liquid cooling
Communication	Ethernet, RS485
Ingress protection	IP55
Dimensions (W x D x H)	1350 x 1300 x 2060mm (±3mm)
- without lifting hooks	1350 x 1300 x 2015mm (±3mm)
Weight	±2.55t
Certification	EN/IEC 61000:2019, IEC 61000:2018, IEC 62477:2012, IEC 62619:2000, UN38.3

