


# Accessory for charging and controlling buffer batteries


- Suitable for power supply with adjustable output
- Suitable for lead batteries
- Suitable for charging batteries while feeding loads
- Battery protection fuse
- "Deep discharge" battery protection
- Status display LED and failure contact

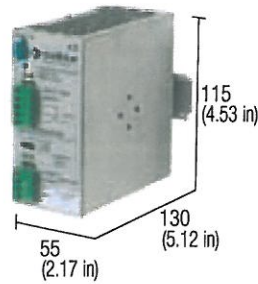

## NOTES

The depth dimension includes the DIN rail clamp.

## BLOCK DIAGRAM

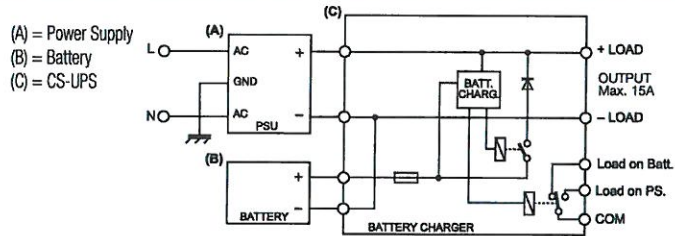

## VERSIONS

Output 24 Vdc  
Output 12 Vdc

## GENERAL TECHNICAL DATA

Power supply input voltage
Power supply rated current
Load rated voltage
Max load current
Charging current
Battery disconnection voltage
IN/OUT voltage drop
Battery protection fuse
Protections
Alarm signals
Operating temperature range
EMC Standards
Overvoltage category/Pollution degree
Protection degree
Connection terminal
Housing material
Approx. weight
Mounting information

Power supply OK:  
Battery OK  
Battery LOW  
Load OK  
Battery reverse polarity

Cod. XCSUPS1  
CS-UPS1

Cod. XCSUPS2  
CS-UPS2

26...28.5 Vdc	12...15 Vdc
≥ 3 A	≥ 3 A
26...28 Vdc	10...15 Vdc
15 A	15 A
selectable 2 A or 4 A	selectable 2 A or 4 A
≤ 18 Vdc ±0.5V	≤ 9.2 Vdc ±0.5V
0.4 V	
T 15 A 42 V blade type	
Reverse polarity, short circuit, battery overload, battery deep discharge	
SPDT 24 V / 1 A	
green LED	
red LED	
yellow LED	
green LED	
-10...+50°C	
IEC 664-1, DIN VDE	
II / 2	
IP 20 IEC 529, EN60529	
2.5 mm <sup>2</sup> pluggable screw type	
aluminium	
300 g (10.58 oz)	
vertical on rail, adjacent	

PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB

## APPLICATIONS

All power supplies with adjustable output voltage to +15% of rated voltage can be used as lead battery chargers, suitable to be used as back up supply in case of AC line breakdown.

The CS-UPS-1 circuit regulate the current charging the battery, and it is possible to set it up to 2A or 4A charging current ; CS-UPS1 disconnects the load from the battery whenever the battery voltage drops under 19Vdc, to avoid total discharge which always shortens battery life.

The module is provided with a fuse protecting the battery and its cable to prevent fire risk in case of short circuit. The module is provided with the following leds display:

**PS OK:** The green LED is on when the power supply feeding the CS-UPS1 is OK and the load is supplied by the power supply while the battery is continuously charged.


**LOAD OK:** Yellow LED is on when CS-UPS1 feeds the load.

**BATT. OK:** Green LED is on when the power supply is turned OFF or disconnected and indicates that the battery is connected and can feed the load.

**BATT. LOW:** Red LED on when the battery is low or discharged.

**REVERSE BATTERY:** Red LED is on when battery is connected with reverse polarity.

**Alarm contact:** a relay with an SPDT contact 1A/24V switches when the load is no more supplied by the power supply and then is supplied by the battery. This contact allows to get a remote warning on the status of the system even in the case that the power supply is turned OFF or damaged, or non more supplied for any reasons.

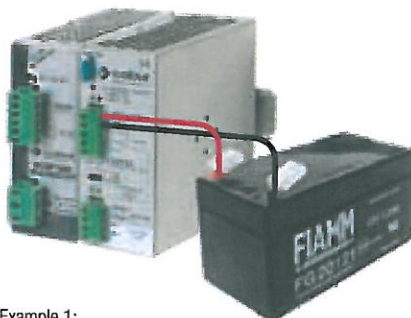

Example 1:  
XCSF120C + XCSUPS1 + batteria



Example 2:  
XCSF120C + XCSUPS1 + XCSBP30Y