

Product SPECIFICATION SHEET



AH5K




CHARACTERISTIC :

- Proximity and photoelectric switch compatible
 - Seven-segment-display for clear display and effective monitoring
 - Protection against power surge and high frequency interference
 - Input signal - active-low or active-high input contact (1+4)
 - Available on Count Up or Count Down model
 - Reset method - shut-off reset or shorting contact (1+3) instantaneous reset
 - Memory switch allows users to enable or disable permanent memory function *
 - Manual reset button on faceplate *
 - UL, C-UL recognized and CE certified *
- Note: *indicates applicable to AH5CK series only


SPECIFICATION :

Operating voltage	AH5CK AC/DC(V): 12-48
	AH5K AC/DC(V): 100-240
Allowable operating voltage range	AH5K DC(V): 12, 24
	AC(V): 12, 24, 110, 220, 240
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Count speed	MAX 60 cps or 200 cps
Reset time	MAX 0.1S
Power consumption	AH5CK Approx. 2.5VA
	AH5K, AH5K-C Approx. 2VA
Life	Mechanical: 5,000,000 times
	Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C
Ambient humidity	MAX 85%RH
Weight	AH5CK Approx. 130g
	AH5K Approx. 170g
	AH5K-C Approx. 160g



CONNECTION :



TIMING CHART :



DIMENSIONS : (mm)

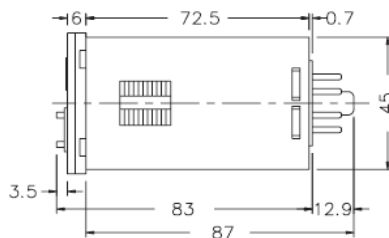

BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

NATIONAL CALL CENTRE

Sales 010 202 3400
 Technical 010 202 3500

www.acdc.co.za