

# Product SPECIFICATION SHEET



## AH5N / AH5N-S



### CHARACTERISTIC :

- Wide operating voltage range in a single unit, from AC/DC 24V~240V
- 8 timing ranges from 1sec to 600hour by pushwheel switch
- 2 modes selectable via slide switch: Mode A (2C) for DPDT time-limiting output contacts and Mode B (1A1C) for SPDT instantaneous and time-limiting output contacts
- UL, C-UL recognized and CE certified


### SPECIFICATION :

Operating voltage	AC/DC(V): 24 ~ 240
Allowable operating voltage range	85~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Reset time	MAX 0.2S
Power consumption	Approx. 2VA
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C
Ambient humidity	MAX 85%RH
Weight	Approx. 130g

### TYPE SELECTION :

Type	AH5N
Output contact	Mode A / B
Time range	1S / 10S / 1M / 10M / 1H / 10H / 60H / 600H


### CONNECTION :

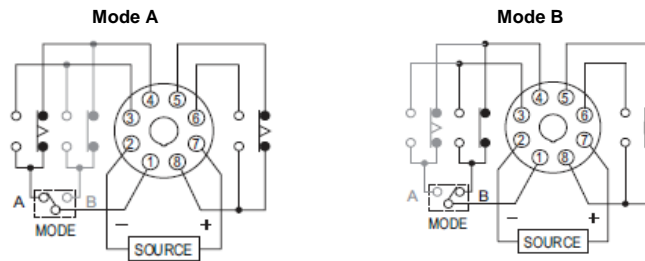

### TIMING CHART :



### DIMENSIONS : (mm)

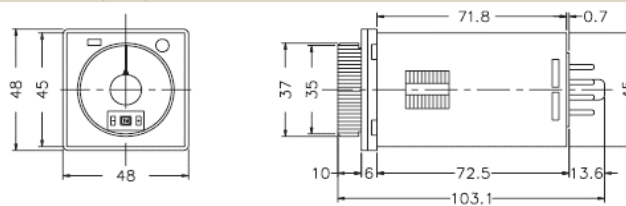

### BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

### NATIONAL CALL CENTRE

Sales 010 202 3400  
Technical 010 202 3500

[www.acdc.co.za](http://www.acdc.co.za)