

RELAY SOCKETS

SPECIFICATION SHEET



Overview


Solder socket for use with 8/11-pin relays (model C42 & C43). Ideally suited for any kind of panel mounted application requiring 'plug-in' serviceability or maintenance. Metal flange mounting via M3 screws to fit panel cut-out. Solder terminals on panel back.

Technical Specifications	
Rating	10A - 250VAC
Insulating Resistance	> 1000Mohm
Dielectric Strength	2kVAC
Temperature Range	-40 - +70°C
Connections Material	Tin Plated Brass
Body Plastic	Thermo-setting Phenolic
Self-Extinguishing Classification	V0 (UL 94)



Environmental Compatibility
(European Directive 2011/65/EU)

Wiring Diagrams

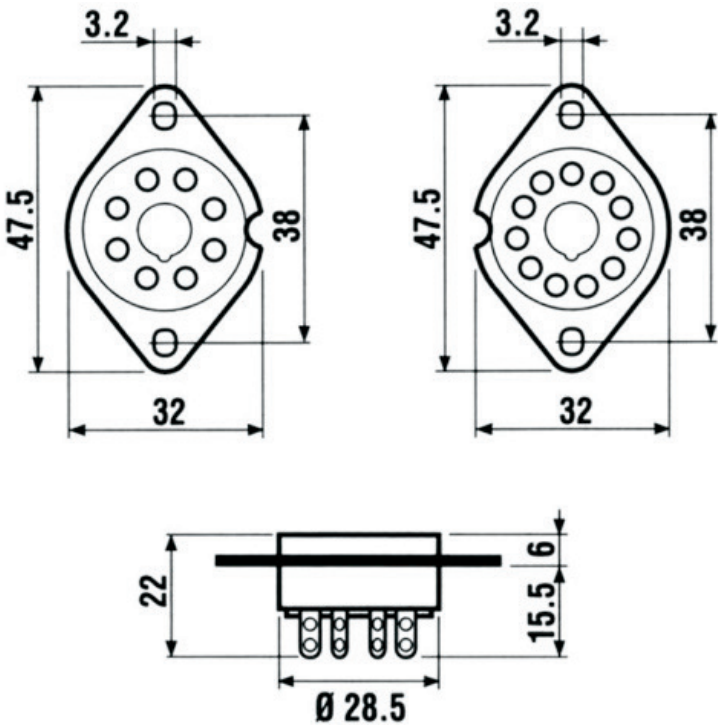

BRANCH CONTACT DETAILS

Johannesburg:	010 202 3300
Cape Town:	021 510 0710
Pinetown:	031 700 4215
Germiston:	011 418 9600
Riverhorse:	031 492 4800



<http://www.acdc.co.za>

NATIONAL CALL CENTRE

Sales	010 202 3400
Technical	010 202 3500

www.acdc.co.za