


ECHO-PIEZO BUZZER


B19 SERIES

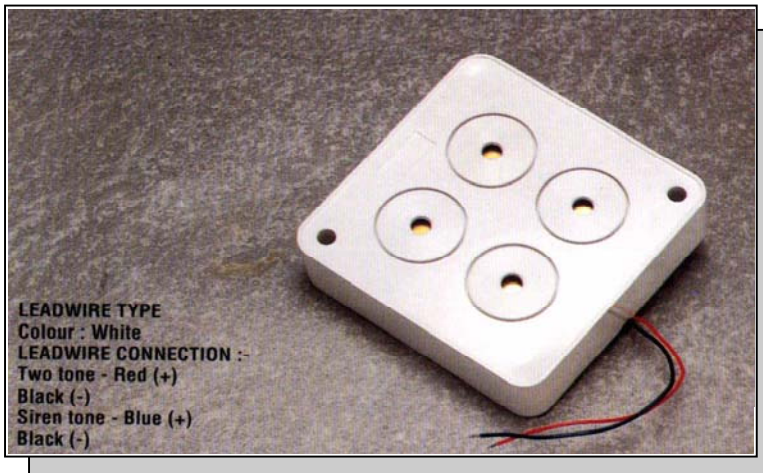


FEATURES:

- Sound-bomb II
- Single/Two/Siren tone
- Piercing loudness
- Rigid construction
- Screw mounting with leadwire
- Operating temperature -20°C --+ 70°C
- Storage temperature -30°C --+ 70°C

DIMENSIONS:

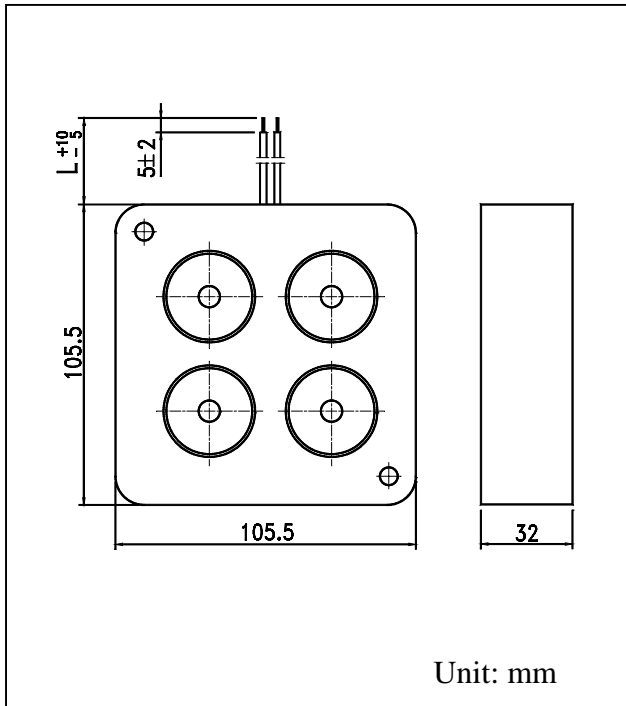

CHARACTERISTICS:

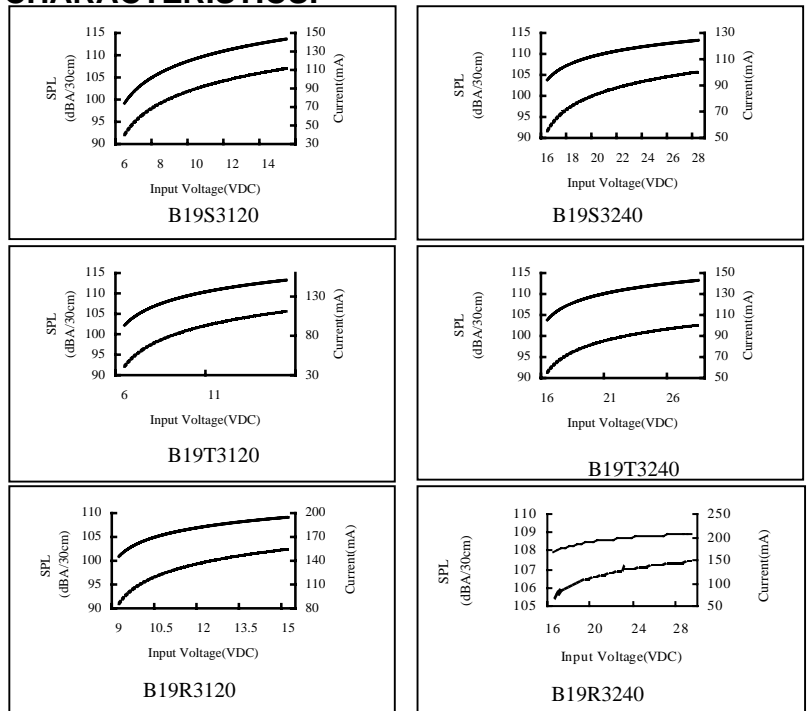

L=130mm, standard (changes as your request)

Remark: ____ Pressure level Current

SPECIFICATIONS:

| Model No. | Operating Voltage (VDC) | Rated Voltage (VDC) | Max. Current at Rated Voltage (mA) | Frequency (kHz) | Min. Sound Pressure at Rated Voltage (dB(A)/1m) | Pulse Rate at Rated Voltage (Pulse/Sec) | Tone | Terminal |
|-----------|-------------------------|---------------------|------------------------------------|-----------------|---|---|--------|----------|
| B19S3120 | 6-15 | 12 | 150 | 2.8±0.5 | 108 | 0 | SINGLE | LEAD |
| B19S3240 | 16-28 | 24 | 150 | 2.8±0.5 | 108 | 0 | SINGLE | LEAD |
| B19T3120 | 6-15 | 12 | 150 | (2.6-2.8)±0.5 | 112 | 0 | TWO | LEAD |
| B19T3240 | 16-28 | 24 | 150 | (2.6-2.8)±0.5 | 112 | 0 | TWO | LEAD |
| B19R3120 | 9-15 | 12 | 150 | 1.5-3.5 | 107 | 0 | ALARM | LEAD |
| B19R3240 | 16-28 | 24 | 150 | 1.5-3.5 | 107 | 0 | ALARM | LEAD |