



Product SPECIFICATION SHEET

ACDC
DYNAMICS
www.acdc.co.za


BBD25011, BBD40011

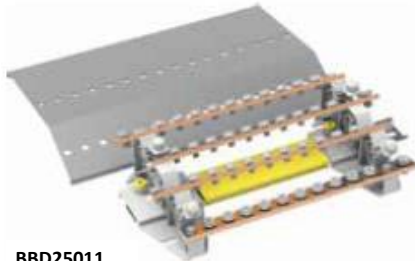

BBD25011

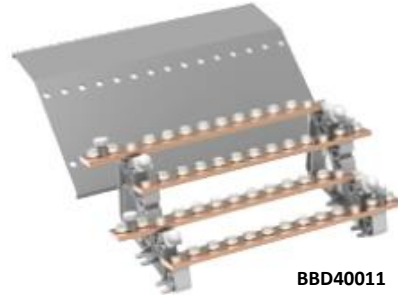

BBD40011

Articolo Item	BBD25011	BB40011
Corrente nominale Rated current	250A	400A
Sezione barra Bar section	20x5 mm	25x6 mm
	A: 280 mm B: 190 mm C: 67 mm	A: 299 mm B: 175 mm C: 110 mm
N° fori per barra Holes number each bar	11 fori - holes 1 x M8 - 10 x M6	11 fori - holes 1 x M8 - 10 x M6
Numero viti e rondelle incluse Included screws and washer	4 x M8 40 x M6	4 x M8 40 x M6
Distanza fra i supporti Distance between supports	209 mm	190 mm
Potenza dissipata per barra Dissipated power for bar	2.74 W	5.18 W
I_{pk}	kA	30
$I_{cc rms}$	kA	15
U_{imp}	kV	8

BRANCH CONTACT DETAILS

Johannesburg 010 202 3300
 Germiston 011 418 9600
 Cape Town 021 510 0710
 Pinetown 031 700 4215
 Riverhorse 031 492 4800

NATIONAL CALL CENTRE

Sales 010 202 3400
 Technical 010 202 3500
www.acdc.co.za