

Product SPECIFICATION SHEET



C12 RELAY

C12-A2x

8-pin, Interface relays, 2-pole, plug-in faston

Type	C12-A2x/ ... V Standard relay 2 change-over contact			
Maximum contact load	5 A/250 V	AC1	0,5 A/110 V	DC1
	5 A/30 V	DC1	0,2 A/220 V	DC1
Recommended minimum contact load	1 mA/10 V (with 10 μ Au) 10 mA/10 V (standard contact)			

Contacts			
Material	Standard	Code 1	AgNi + 0,2 μ Au
	Optional	Code 2	AgNi + 10 μ Au
Rated current	5 A		
Switch-on current max. (20 ms)	15 A		
Switching voltage max.	250 V		
AC load	1,2 kVA		
DC load	see fig. 2		

Coil		
Coil resistance	see table; tolerance $\pm 10\%$	
Pick-up voltage	$\geq 0,8 \times U_N$	
Release voltage	$\geq 0,1 \times U_N$	
Nominal power	1,1 VA (AC)/0,7 W (DC)	

Coil table					
VAC	Ω	mA	VDC	Ω	mA
24	290	45	12	224	53
48	1200	23	24	742	32
115	7.300	9,5	48	3.500	13,7
230	28.800	4,7	110	19.900	5,5

Insulation	Volt rms, 1 min
Contact open	1000 V
Contact/contact	3000 V
Contact/coil	5 kV
Insulation resistance at 500 V	$\geq 3 \text{ G}\Omega$
Insulation, IEC 61810-5	4 kV/3

Specifications	
Ambient temperature operation/storage	-40 (no ice)...60 °C / -40 ... 80 °C
Pick-up time/bounce time	10 ms/ ≤ 1 ms
Release time/bounce time	5 ms/ ≤ 3 ms
Mechanical life	AC: 10 Mill./DC: 20 Mill. switching cycles
Rated load	≥ 100000 switching cycles
Switching frequency at rated load	$\leq 1200/\text{h}$
Protection class	IP40
Weight	21 g

Standard types			
AC 50 Hz/60 Hz: 24, 48, 115, (120), 230, (240)			
LED			
RC suppresor			
DC 12, 24, 48, 110			
LED			
Polarity and free wheeling diode			
AC/DC bridge rectifier 24 V, 48 V, 60 V			
C12-A21/AC ... V	C12-A21X/AC ... V	C12-A21R/AC ... V	C12-A21FX/DC ... V
C12-A21/DC ... V	C12-A21X/DC ... V	C12-A21FX/DC ... V	C12-A21BX/UC ... V
C12-A22/AC ... V	C12-A22X/AC ... V	C12-A22R/AC ... V	C12-A22FX/DC ... V
C12-A22/DC ... V	C12-A22X/DC ... V	C12-A22FX/DC ... V	C12-A22BX/UC ... V

"..." Enter the voltage for full type designation

Accessories	
Socket:	S12, S12-P



Connection diagram




Fig. 1 AC voltage endurance



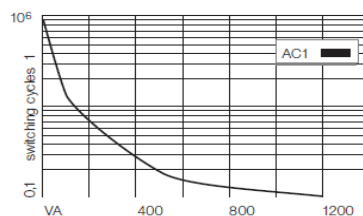


Fig. 2 DC load limit curve

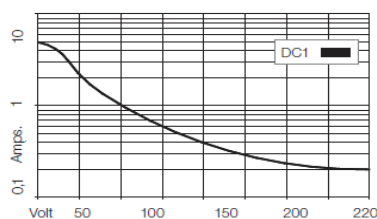

Dimensions [mm]



Technical approvals, conformities



IEC 61810; EN 60947

BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

NATIONAL CALL CENTRE

Sales	010 202 3400
Technical	010 202 3500

www.acdc.co.za