C2-107

HIGH POWER LED WORK LAMP

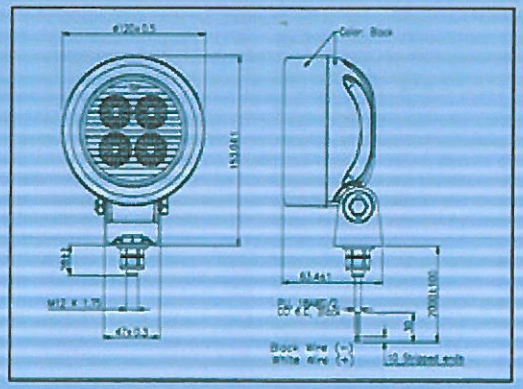

FEATURES

- Ideal for off-road vehicles, construction, agricultural, marine and forestry equipment.
- Sealed water-tight lens assembly
- Bracket allows for back & forth tilt adjustment
- Versatile single - bolt mounting system.
- PC vacuum-coated reflector
- Heat sink: die casting Aluminum
- Thermal shock resistant
- IP: 66

OPERATION

- Connect wires to power source.

SPECIFICATION

- Lens: PC / glass
- Pre-wired with 30 cm PU cable
- Unavailable in America market

	C2-107	C2-107C	C2-107U	C2-107S
Power Consumption	9-64V DC /8.5W	9-64V DC /8.4W	9-96V DC /7.2W	9-64V DC /14W
LED	3W, 4pcs, white (5000-6500K)	3W, 4pcs, white (5000-6500K)	3W, 4pcs, white (5000-6500K)	Cree 5W, 4pcs, white (5000-6500K)
Beam Pattern(FWHM)	wide - 60°/narrow - 40°	wide - 40°/narrow - 20°	wide - 60°/narrow - 40°	wide - 40°/narrow - 20°
Light Intensity(Candela)	Wide - 800/Narrow - 1500	1400	Wide - 800/Narrow - 1500	Wide - 2200/Narrow - 2700
Total Luminous Flux(Lm)	440	250	440	Wide - 1000/Narrow - 600
Partial LED Flux(Lm)	Wide - 800/Narrow - 1800	1100	Wide - 800/Narrow - 1800	Wide - 2800/Narrow - 2400
Operation Temperature	-20°C ~ +60°C	-30°C ~ +85°C	-30°C ~ +85°C	-30°C ~ +85°C

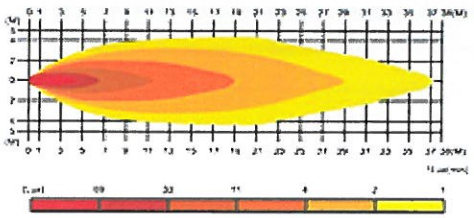

C2-107C / C2-126C-narrow

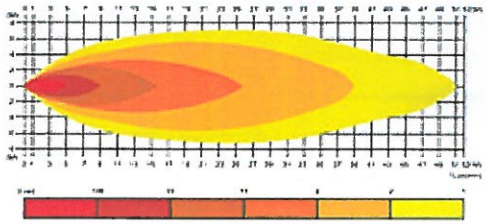

C2-107S / C2-126S-narrow

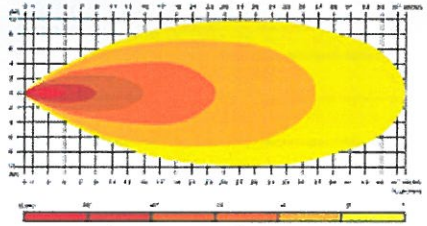

C2-107S / C2-126S-wide

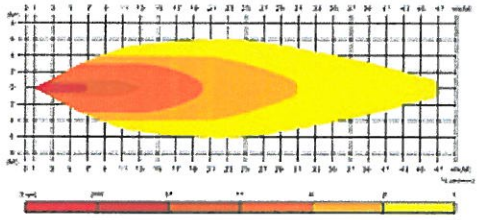

C2-107&107U / C2-126&126U-narrow



C2-107&107U / C2-126&126U-wide