

Product SPECIFICATION SHEET

MOTOR RUN CAPACITOR 440VAC

CAR-*



General Descriptions

Motor run capacitors manufactured with self healing metallized polypropylene film and encapsulated in self-extinguishable and aluminium cans.

Terminals

- Double faston 6.3 mm tags
- 2x0.75 of 210 mm twin cable
- 200 mm leads

Fixing


- Bottom screw M8

Standards

- IEC 60252
- UNE-EN 60252

Technical Characteristics

Dielectric	Metallized polypropylene film
Tolerance	±5%
Frequency	50/60 Hz
Temperature Range	-25 + 85°C
Discharge Resistors	Built-in
Voltage Vca	400/450 Vac
Test Voltage between terminals to case	2.4 kV
Insulation resistance	>2000MΩ 500V
Tan Vn50 Hz, 20° C	< 10· 10 ⁻⁴
Can	Aluminium/plastic

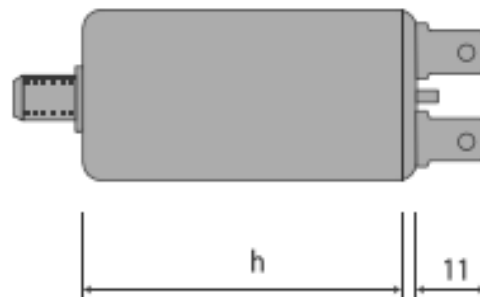

Capacity: from 2 μ F to 65 μ F
Voltage: 450 V
Diameter: 25, 30, 35, 45, 50 mm
Lenght (h): 52, 56, 74, 94, 98 mm
Terminal: faston connector 6.3 mm
Fixing: no
Plastic can

BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

NATIONAL CALL CENTRE

Sales 010 202 3400
Technical 010 202 3500

www.acdc.co.za