


Product SPECIFICATION SHEET

RESIN CAST CT CL0.5 10VA 660V

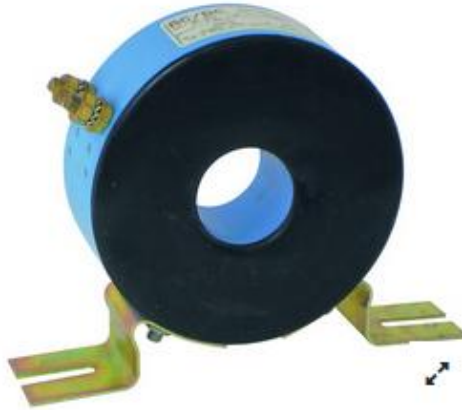

Type:	Outdoor Ring CT
Designed to spec	IEC 60044-1
IP Code	IP 65
Operating Voltage (Um)*	0.66-1000V
Rated power frequency withstand voltage (1 Minute)	3kV
Rated frequency	50-60Hz
Rated primary Current	2500A
Rated secondary Current	1A and 5A
Maximum no of cores	1 (more on request)
Rated output (VA)	<5,10,15,30VA (other available)
Rated accuracy class	0.2,0.5,1,3,5,5P,10P and PX (other available)
Secondary terminals	6mm Brass stud
Capacitive voltage output	Not available
Terminal box	Yes
Weight(approx.)	15kg
Drawing	2206/2207 and 2525
DIMENSIONS:	
Inner diameter	36,47,57,71,104,118,134
Outer dimension	200 X 200mm and 250 X 250mm
* Can be used at higher Um if primary is adequately insulated.	

BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

NATIONAL CALL CENTRE

Sales	010 202 3400
Technical	010 202 3500

www.acdc.co.za