



Socket Model ZV

Screw terminal sockets designed for use with 8 and 11-pin plug-in relays (model C4-2 & C4-3). Mounting can be arranged either directly on panel or via DIN-46377 Omega rail. Screw terminals with jaw-type rising clamps. Reduced lateral dimensions allowing high density on DIN-rail. Both screws and terminals are touch-proof / finger protected to IP20. Suited to accept plug-in protection and indication modules.

SPECIFICATION

Rating :	10A 250VAC
Insulating resistance :	$\geq 1000 \text{ M}\Omega$
Dielectric strength :	$\geq 2 \text{ KV}$
Temperature range :	-40 ... +70°C
Max torque :	0.5 Nm
Max wire size :	2x2.5 sq.mm (2x14 AWG)
Dimensions :	67x38x25,5 mm
Connections material :	nickel-plated brass
Body plastic :	self-extinguishing PA66
UL94 Rating :	V0
Enclosure classif. (EN 60529)	IP20

Approvals:




Available Accessories :

Metal retaining clip	Type MBOU
LED module	Type AL
LED & diode module	Type ALD
Diode module	Type AD
Varistor module	Type AV
LED & varistor module	Type ALV
Resistor & capacitor module	Type ARC

AVAILABLE TYPES :

ZVO (8-pin)

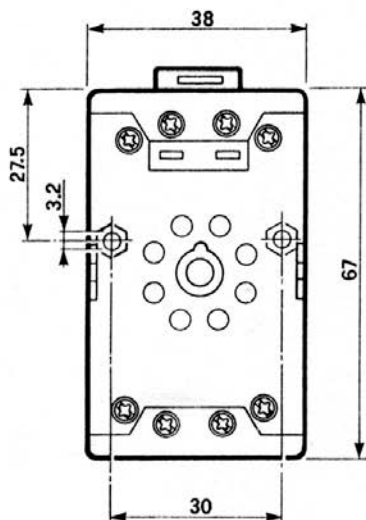

ZVU (11-pin)

