

# Product SPECIFICATION SHEET



## DINEX 250F



### Application

Used for draining wells, garages, cellars, sumps any area subject to flooding or water ingress. Maximum immersion depth 5m Continuous rated. Maximum particulate size 10mm


### Materials

Pump Body	Stainless Steel
Motor Casing	Stainless Steel
Impeller	Stainless Steel
Shaft	Stainless Steel (Ceramic coated sleeve)
Mechanical Seal	Silicon Carbide in oil chamber

### Motor

Motor	Asynchronous two pole induction motor
Insulation	Class F
Protection	IPX8
Single phase with capacitor and thermal protector	

### PERFORMANCE CHART AT n=2900 r/min

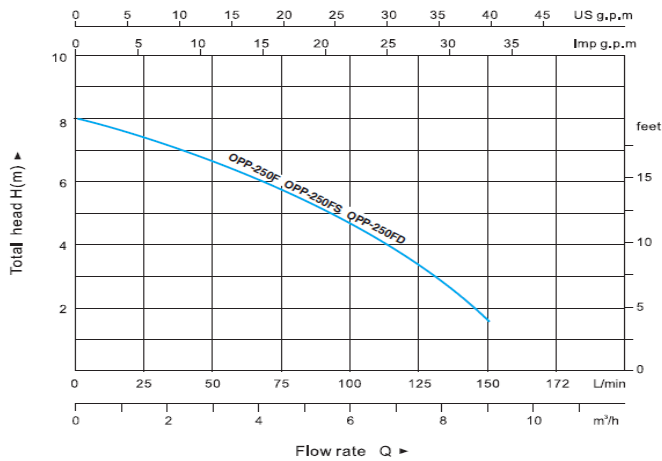

Code	Voltage	Power		Amps	Max Head (m)	Max Flow (l/min)	Outlet (inch)
		KW	HP				
DINEX 250F	230	0.25	0.33	2.2	8	133	1¼

### BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

### NATIONAL CALL CENTRE

Sales	010 202 3400
Technical	010 202 3500

[www.acdc.co.za](http://www.acdc.co.za)