

Product SPECIFICATION SHEET



DINOX 250F



Application

Used for draining wells, garages, cellars, sumps any area subject to flooding or water ingress. Maximum immersion depth 5m
Continuous rated. Maximum particulate size 20mm


Materials

Pump Body	Stainless Steel
Motor Casing	Stainless Steel
Impeller	Stainless Steel
Shaft	Stainless Steel (Ceramic coated sleeve)
Mechanical Seal	Silicon Carbide in oil chamber

Motor

Insulation	Asynchronous two pole induction motor
Protection	Class F
	IPX8
	Single phase with capacitor and thermal protector

PERFORMANCE CHART AT n=2900 r/min

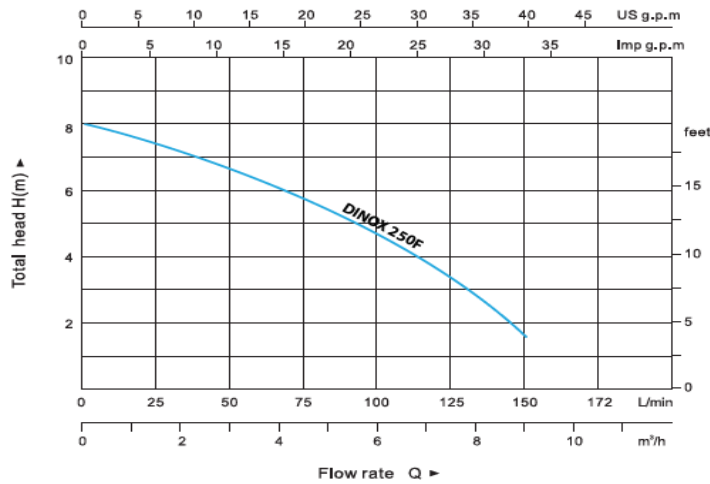

Code	Voltage	Power		Amps	Max Head (m)	Max Flow (l/min)	Outlet (inch)
		KW	HP				
DINOX 250F	230	0.25	0.33	2.2	8	133	1, 1¼, 1½

BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

NATIONAL CALL CENTRE

Sales	010 202 3400
Technical	010 202 3500

www.acdc.co.za