

Product SPECIFICATION SHEET










DL-*EBK5

These filters are suitable for power supplies for industrial installations, particularly for output filters used on converter equipments such as inverter speed controls. They offer wide current range and low leakage current.



Model DL-	5EBK5	10EBK5	25EBK5	35EBK5	50EBK5
Rated Current	5A	10A	25A	35A	50A
Operating Frequency	50 - 60Hz				
Rated Voltage	275 - 400VAC				
Test Voltage (1min)	1500VDC Line - Line				
Test Voltage (1min)	2250VDC Line - Ground				
Ground Capacitance	200nF				320nF
Discharge Resistance	1.5MΩ				
Leakage Current (mA)	≤ 1.0mA				
Loss V	≤ 1.5				

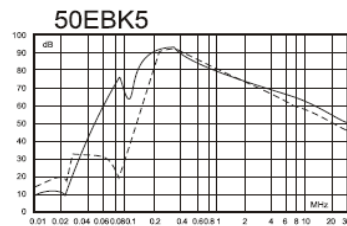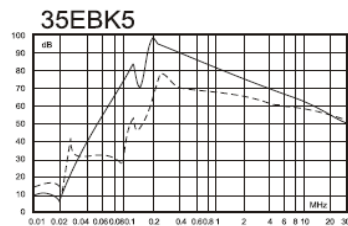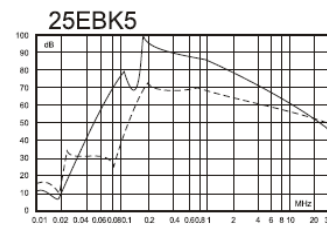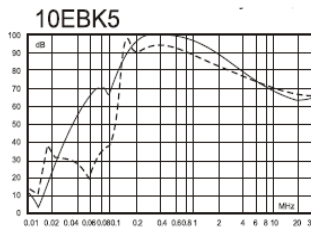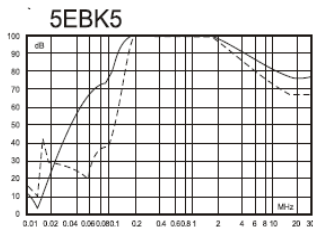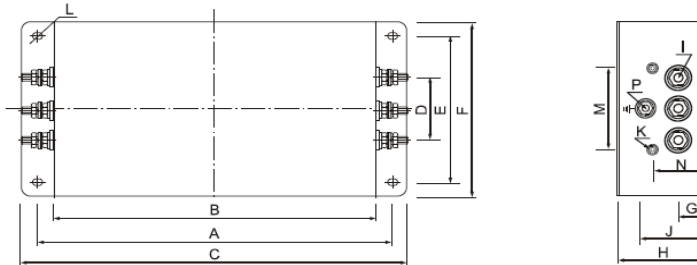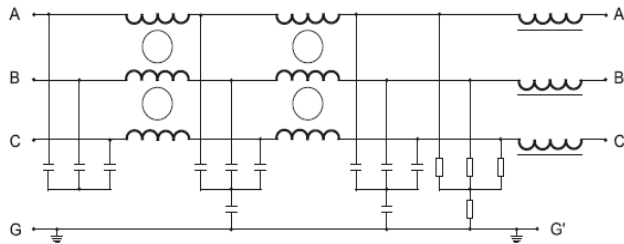

BRANCH CONTACT DETAILS

Johannesburg 010 202 3300
 Germiston 011 418 9600
 Cape Town 021 510 0710
 Pinetown 031 700 4215
 Riverhorse 031 492 4800

NATIONAL CALL CENTRE

Sales 010 202 3400
 Technical 010 202 3500

www.acdc.co.za