

PUMPS

SPECIFICATION SHEET



DRAINEX 200

Applications
Drainage of sewage and dirty water, operation in septic tanks and small purifying installations.


CONSTRUCTION & MOTOR FEATURES

- Pump body, discharge body, suction body and impeller in cast iron.
- Mechanical seal in silicon carbide and ceramic.
- Pump base in AISI 304 stainless steel, detachable for coupling of accessories.
- O-rings in NBR.
- Motor shaft in AISI 420 stainless steel.
- Asynchronous, two poles.
- **IP68** protection.
- Class F insulation.
- Continuous operation.
- Single-phase version built-in thermal protection and capacitor.

DRAINEX - SUBMERSIBLE DRAINAGE MONOBLOC PUMPS

CODE	Hz	HP	kW	Volts	Amps	Amps
DRAINEX 200	50Hz	1.5	1.1	400V	-	2.3
DRAINEX 201	50Hz	1.5	1.1	400V	-	2.6
DRAINEX 202	50Hz	1.5	1.1	400V	-	2.8


DIMENSIONS

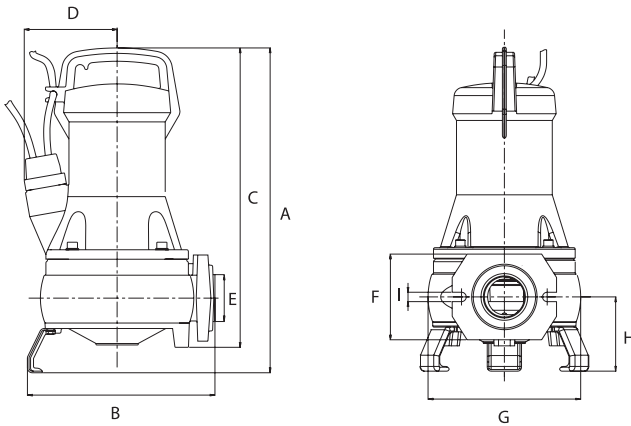

CODE	DIMENSIONS (mm)									Kg
	A	B	C	D	E	F	G	H	I	
DRAINEX 200	415	239.5	383	118.7	2"	110	196	95	12	25
DRAINEX 201	415	239.5	383	118.7	2"	110	196	95	12	25
DRAINEX 202	415	239.5	383	118.7	2"	110	196	95	12	25

PERFORMANCE CURVES AT 2900 r.p.m.

Q - l/min	50	100	150	200	300	400	450	500
Q - m³/h	3	6	9	12	18	24	27	30
H (m)								
DRAINEX 200	10.8	9.8	8.6	7.3	4.6	2	-	-
DRAINEX 201	14.5	13.3	12	10.8	8	5.2	3.8	2.3
DRAINEX 202	14.5	13.3	12.2	11	8.2	5.3	4	2.5

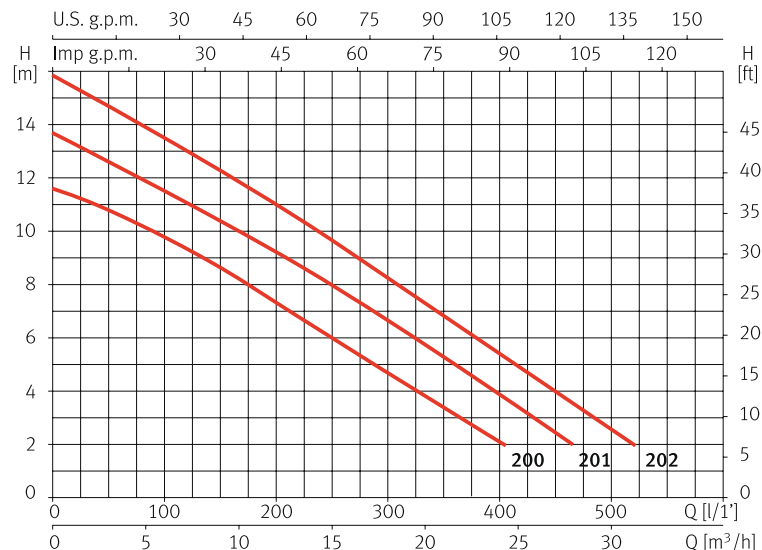

BRANCH CONTACT DETAILS

Johannesburg:	010 202 3300
Cape Town:	021 510 0710
Pinetown:	031 700 4215
Germiston:	011 418 9600
Riverhorse:	031 492 4800



<http://www.acdc.co.za>

NATIONAL CALL CENTRE

Sales **010 202 3400**
Technical **010 202 3500**

www.acdc.co.za