

PUMPS

SPECIFICATION SHEET



Floor pump is suitable for lifting clear and slightly dirty water not containing abrasive substances. These pumps are designed for easy use and are extremely reliable even when subjected to continuous use, since the motor is fully cooled plus a double mechanical seal. Due to the capacity to drain water to 10mm, these pumps are suitable for domestic emergency use, for small flooded areas and for all those applications where maximum drainage potential is required.


Operating Limits

- Maximum operating depth is 5 meter below water level
- Maximum fluid temperature is 40°C
- Maximum passage for suspended solids Ø 5mm
- Maximum emptying level 10mm from bottom

Structural Characteristics

- Aluminium pump body
- Stainless steel mechanical seal (graphite to ceramic)
- Stainless steel, rubber coated impeller
- With thermal overload protection

CODE	Power	Outlet	Head Max	Voltage
DRENAP L5-450	450W	25mm	10m	230VAC

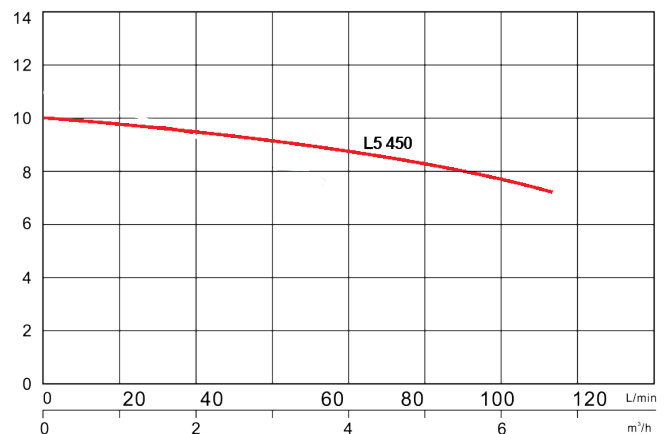

BRANCH CONTACT DETAILS

Johannesburg:	010 202 3300
Cape Town:	021 510 0710
Pinetown:	031 700 4215
Germiston:	011 418 9600
Riverhorse:	031 492 4800



<http://www.acdc.co.za>

NATIONAL CALL CENTRE

Sales	010 202 3400
Technical	010 202 3500

www.acdc.co.za