PUMPS

SPECIFICATION SHEET

ACDC DYNAMICS
www.acdc.co.za

DRENAP / DRENAPS

SUBMERSIBLE DRAINAGE / FOUNTAIN PUMPS

These pumps can be used to pump clean water from garages or basements, to empty swimming pools or tanks or to supply garden fountains. 230VAC, c/w Float Switch.

Operating Limits

- Maximum solid diameter: 5mm
- Maximum immersion depth: 7m
- Maximum fluid temperature: 40˚C
- Maximum ambient temperature: 40˚C

Materials

Pump body, impeller, handle and suction strainer in reinforced technopolymer. Motor shaft in stainless steel with sleeve protection on mechanical seal side. Mechanical seal in ceramic and graphite.

CODE	kW	Head Max	Flow Max
DRENAP 6-6MA	0.3	5.8m	100L/min
DRENAP 10-9MA	0.42	8.8m	175L/min
DRENAP 16-10MA	0.66	9.5m	240L/min
DRENAPS 6-6MA	0.18	5.8m	100L/min

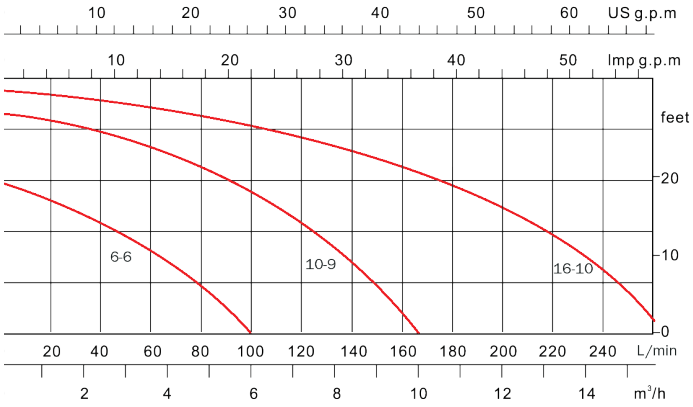

BRANCH CONTACT DETAILS

Johannesburg:	010 202 3300
Cape Town:	021 510 0710
Pinetown:	031 700 4215
Germiston:	011 418 9600
Riverhorse:	031 492 4800

http://www.acdc.co.za

NATIONAL CALL CENTRE

Sales 010 202 3400
Technical 010 202 3500

www.acdc.co.za