

PRODUCT

SPECIFICATION SHEET

Direct Service • Dynamic Solutions



Socket Model ZVE

Screw terminal sockets designed for use with 8/11-pin plug-in relays (model C4-2 & C4-3). Mounting on panel can be arranged either directly or via DIN-46377 Omega rail. Screw terminals with jaw-type rising clamps. Reduced lateral dimensions allowing high density on DIN-rail. Both screws and terminals are touch-proof/finger protected to IP20.

SPECIFICATION


| | |
|-------------------------------|--|
| Rating : | 10A 400VAC |
| Insulating resistance : | $\geq 1000 \text{ M}\Omega$ |
| Dielectric strength : | $\geq 2,5 \text{ KV}$ |
| Temperature range : | -40 ... +85 °C |
| Screw torque : | 0.8 Nm |
| Max wire size : | 2 x 2.5 sq.mm (2 x 14 AWG) 1 x 6 sq.mm (1 x 10 AWG) |
| Wire strip length : | 7 mm |
| Dimensions : | 65x38x27h mm |
| Connections material : | nickel plated brass |
| Body plastic : | self-extinguishing PA6 |
| UL94 Rating : | V2 |
| Enclosure classif. (EN 60529) | IP20 |
| Approvals: | CE |

Available Accessories :
Metal retaining clip Type MBOU

AVAILABLE TYPES :

ZVE8 (8-pin)

ZVE11 (11-pin)

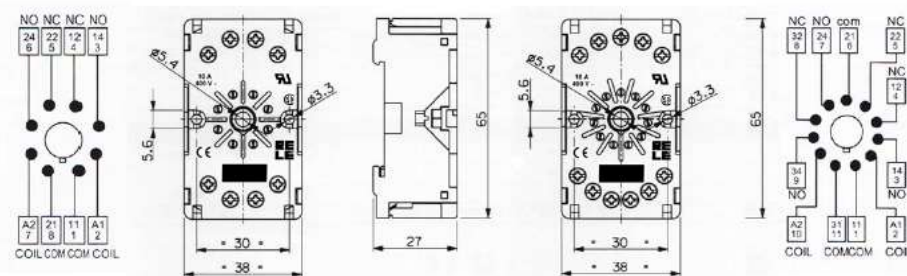

BRANCH CONTACT DETAILS

| | |
|---------------|--------------|
| Johannesburg: | 010 202 3300 |
| Cape Town: | 021 510 0710 |
| Pinetown: | 031 700 4215 |
| Germiston: | 011 418 9600 |
| Riverhorse: | 031 492 4800 |



<http://www.acdc.co.za>

NATIONAL CALL CENTRE

Sales 010 202 3400
Technical 010 202 3500

www.acdc.co.za