

E2S IS MINIALITE BEACON


The IS Minialite Beacon is a compact beacon with an array of six high output L.E.D's. Approvals include ATEX, IECEx and GOST-R for Zone 0 applications and FM approval for Class I Division 1 and Class I Zone 0 applications. The IS Minialite Beacon is suitable for all intrinsically safe signalling applications including fire, security and process control.



EISBR24	16-28VDC
EISBA24	
EISBB24	
EISBG24	

SPECIFICATIONS

VOLTAGE	16-28 VDC (via Zener Barrier)
DUTY CYCLE	Continuous Rated
CURRENT CONSUMPTION	25mA (Typical when powered from 24V via a 28V-3000Ohm Zener Barrier)
COLOUR	Red, Amber, Blue, Green
LIGHT SOURCE	6 High Intensity LED's
CLASSIFICATION	Ex II 1G EEx ia IIC T4
CERTIFICATION	05 ATEX 2084X
GAS GROUP	Zone 0, 1 & 2, Gas Group IIC
IGNITION GROUP	T4-135°C
IP RATING	IP 65
PACKING DIMENSIONS	100x100x100mm

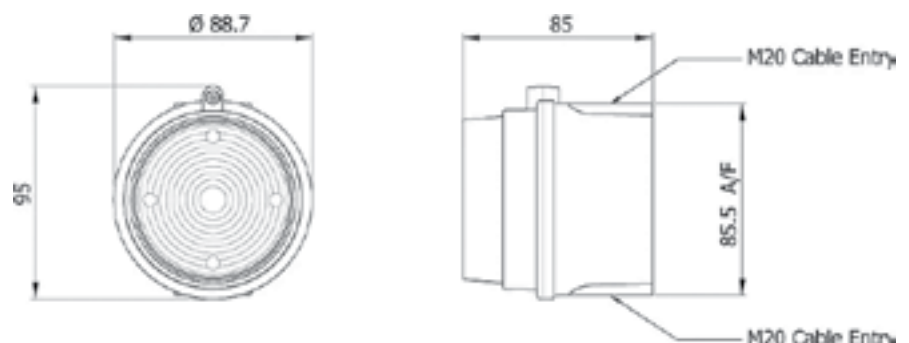

IP65



All dimensions in mm