


Product SPECIFICATION SHEET

EBC*-SERIES 7 STAGE BATTERY CHARGER



7-STAGE CHARGING DIAGRAM

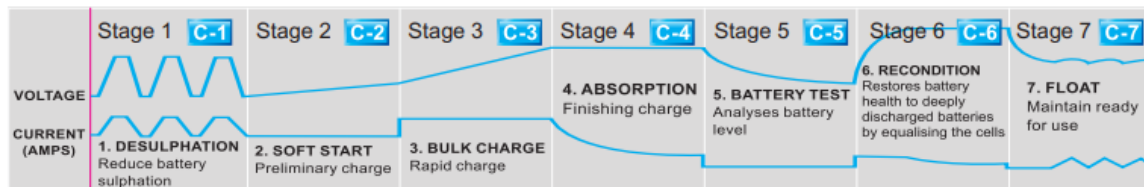

Specification:

Model	EBC1240	EBC2420	EBC1250	EBC2425	EBC1260	EBC2430
Input Voltage	AC220V(190-265V)					
Output Voltage	DC12V	DC24V	DC12V	DC24V	DC12V	DC24V
Max.charging current	40A	20A	50A	25A	60A	30A
Suggested Battery Capacity	266-400Ah	133-200Ah	333-500Ah	166-250Ah	400-600Ah	200-300Ah
Bulk/absorption Charging	14.2V/14.6V/14.8V DC selectable(12V)			28.4V/29.2V/29.6V DC selectable(24V)		
Floating Charging	13.2V/13.5V/13.8V DC selectable(12V)			26.4V/27.0V/27.6V DC selectable(24V)		
Protection Function	Reverse polarity, output short-circuit, over current, over voltage, overload, over heat					
Charging way	Automatic 7 stage charging: Desulphation, soft start, bulk, absorption, battery test, recondition and float					
LED display	(U-I-C-P) Battery voltage, output current, charge status, overheat protection					
Battery type	All rechargeable lead acid battery					
Operating Temperature	0-40°C					
Ventilation	Cooling fan; By thermal & current control					
DIMENSION	22.6*17.5*9.5cm (L*W*H)					
N.W/UNIT	2060g					
QTY/Ctn	6 pcs/box. 42.5*34.3*37.5cm					
G.W./Ctn	16.5kg					
Certification	CE.RoHS.SONCAP					

BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

NATIONAL CALL CENTRE

Sales 010 202 3400
Technical 010 202 3500

www.acdc.co.za