

EXPLOSION PROTECTED EQUIPMENT



BANSHEE EX DUPLO SIREN S1


This motorised siren is suitable for use in fiery mines as well as petrochemical plants and areas where an explosion-protected device is required. The unit consists of a 304 type stainless steel housing with a M20 cable entry, a stainless steel nose cone and a unique screw on lid for cable connection.

BFSM110 | 110VAC/DC | BFSM220 | 220VAC/DC

SPECIFICATIONS

VOLTAGE	110VAC/DC 220VAC/DC
DUTY CYCLE	Continuous (Thermal cut-out protected)
SOUND OUTPUT	123dB(A) at 1m
SOUND FREQUENCY	950 - 1200Hz
APP. RANGE	1000m In still air on open field
CURRENT CONSUMPTION*	110VAC/DC - 2A 220VAC/DC - 1A
CLASSIFICATION	Exd I/IIC 150°C
CERTIFICATION	MS - XPL/06849
GAS GROUPS	I, IIA, IIB, IIC
IGNITION GROUP	T6 - 85°C
WEIGHT	11.3kg
PACKING DIMENSIONS	200x250x200mm

*Startup current x8 of nominal current

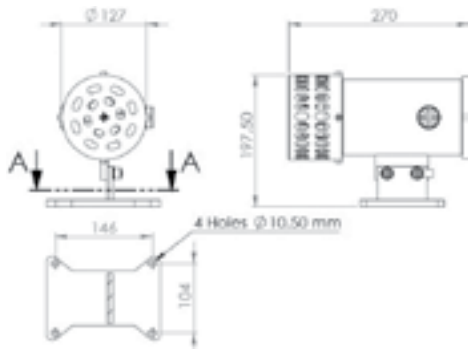

All dimensions in mm

AVAILABLE IN THE FOLLOWING MATERIALS

Standard Stainless Steel with brass flanges

Complete 304 Stainless Steel

Complete 316 Stainless Steel

