



ET-MS01
ET-MSZ04

Relay Modules SPECIFICATION SHEET

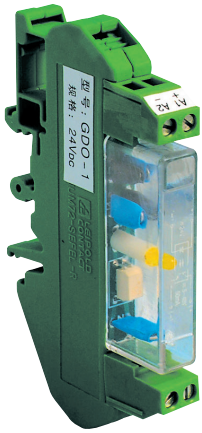

ET-MS01
1 Way

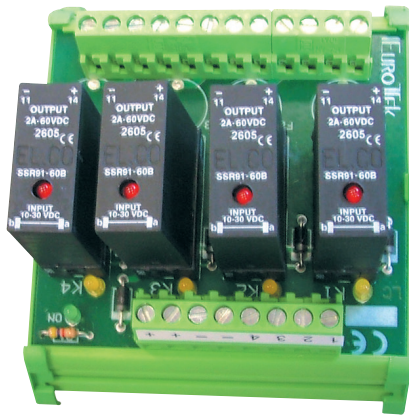

ET-MSZ04
4 Way



TECHNICAL SPECIFICATIONS

Nominal Logic Voltage	24VDC
Logic Voltage Range	3-32VDC
Nominal Input Resistance	1K
Load Voltage Range	24-280VAC
Current Rating	4A
Turn-On Time (μ S)	1/2 Cycle - Zero Voltage
Turn-Off Time (μ S)	1/2 Cycle - Zero Current
Operating Frequency	25-65Hz
Isolation Voltage	4000Vrms



- Their use is intended for resistive loads (W). For other loads please contact the head office.
- The modules comply the EN 50081-1 emission and the EN 50082-1 immunity standards, with reference to the relating test specifications.

OPTOCOUPLEDERS MODULES - STATIC RELAYS

Control Wiring Diagrams

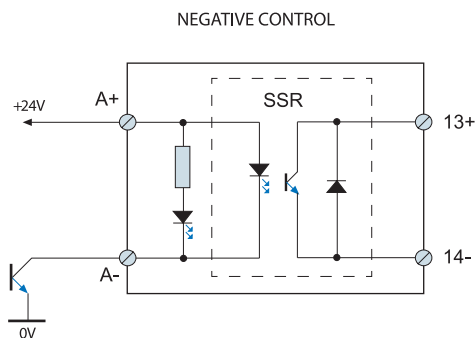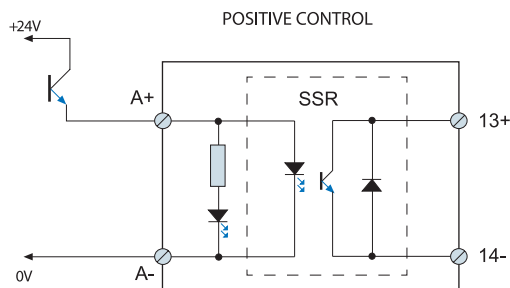

Load Curves

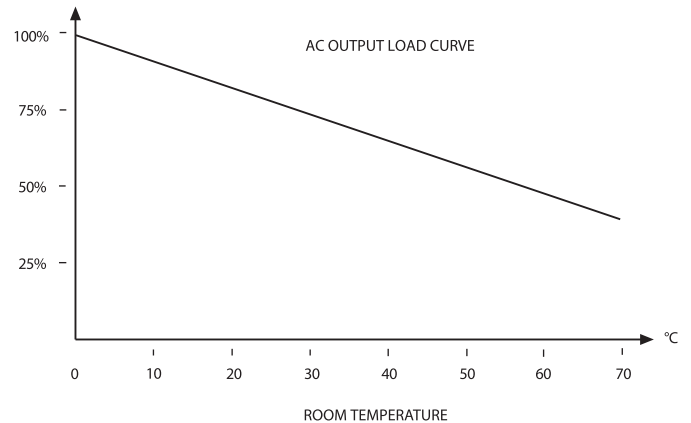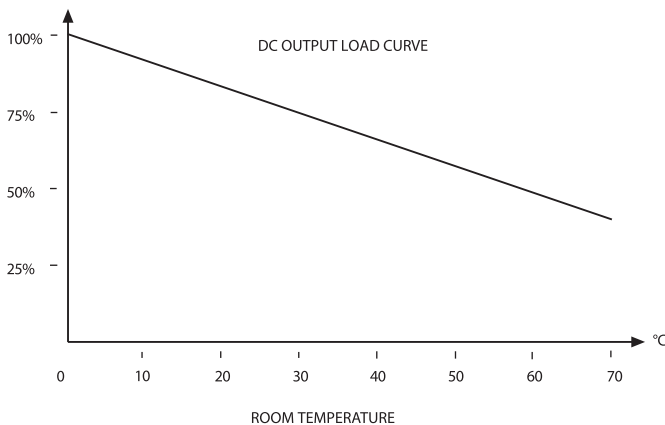

BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

Contact Us
Today!

NATIONAL CALL CENTRE

Sales 010 202 3400
Technical 010 202 3500
www.acdc.co.za