Product SPECIFICATION SHEET

ACDC DYNAMICS
www.acdc.co.za

ETNA1C

Application
Recycling and filtering of water in small to medium swimming pools and spa pools

Materials

Pump body and diffuser:	Glass Loaded Polypropylene
Impeller:	Glass loaded Noryl
Mechanical seal:	Ceramic and Graphite
Shaft	Stainless Steel
Motor Housing:	Aluminium

Motor	**2 Pole induction motor**
Insulation:	**Class F**
Proptection:	**IPX5**
Duty Cycle:	**Continuous**

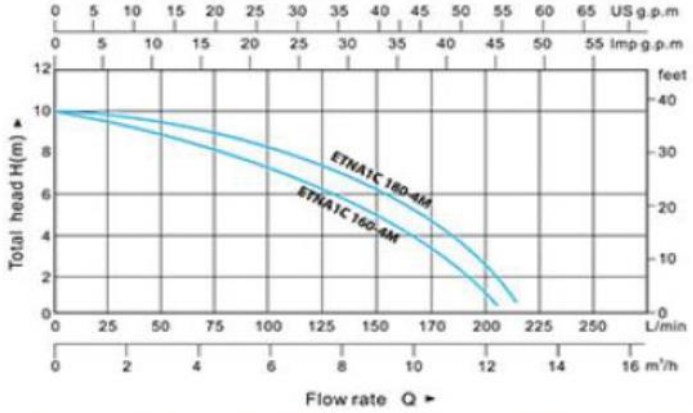

Code	Voltage	Power		Amps	Max Head (m)	Max Flow (l/min)	In / Out (Inch)
		KW	HP				
ETNA1C 160-4M	230VAC	0,25	0,33	1,9	10	200	1½ x 1½
ETNA1C 180-4M	230VAC	0,37	0,5	3,2	10	230	1½ x 1½

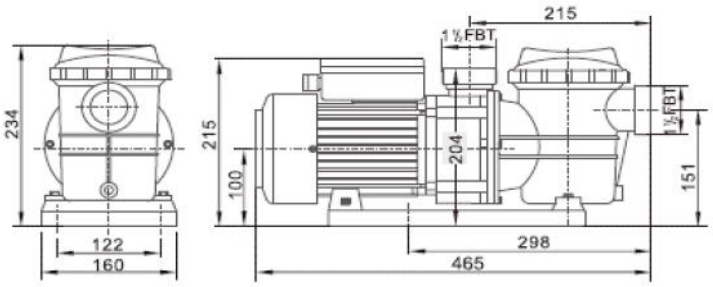

BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

NATIONAL CALL CENTRE
Sales 010 202 3400
Technical 010 202 3500
www.acdc.co.za