

# Product SPECIFICATION SHEET



## ETRF Series




### Features

- Three phase + Neutral
- Rated Voltage 480VAC 50/60Hz
- Rated Current From 16A - 180A
- High attenuation in common and differential modes
- Low leakage current
- Screw terminals
- Protection IP20
- Insulation Line - Line
- Insulation Line - Ground

Code ETRF***-MHU	4016	4030	4042	4055	4075	4100	4130	4180
Nominal Current	16	30	42	55	75	100	130	180
Min Leakage Current	0.05mA	0.05mA	0.05mA	0.05mA	0.05mA	0.05mA	0.05mA	0.05mA
Max Leakage Current	14mA	28mA	28mA	28mA <td>40mA</td> <td>40mA</td> <td>130mA</td> <td>130mA</td>	40mA	40mA	130mA	130mA
Power Loss	12W	26W	35W	46W	34W	38W	39W	42W
Max Cable Size mm <sup>2</sup>	0 - 10	1 - 10	0 - 16	0 - 25	0 - 35	16 - 70	25 - 120	26 - 120
Case Size	A	B	B	C	D	E	F	F
Weight Kg	1.8	3	3.2	3.9	5	6.8	11	13

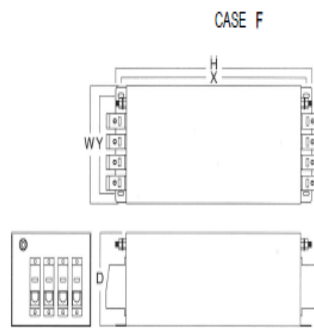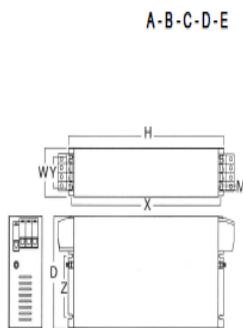

CUSTODIA CASE	H mm	W mm	D mm	X mm	Y mm	Z mm	M
A	308	60	142	290	30	60	M 5
B	308	70	172	290	40	90	M 5
C	384	80	172	330	50	90	M 6
D	427	80	185	363	50	100	M 6
E	436	90	220	363	65	110	M 8
F	542	200	160	468	166	-	M 10

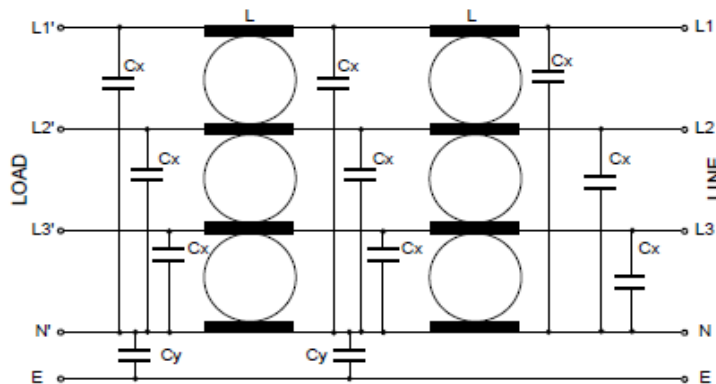

### BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

### NATIONAL CALL CENTRE

Sales	010 202 3400
Technical	010 202 3500
<a href="http://www.acdc.co.za">www.acdc.co.za</a>	