


Product SPECIFICATION SHEET




FDC-K Series




Standards	IEC60947-4, GB14048.4
Max Rating Inductive (AC3)	9A / 400VAC, 4kW / 400VAC
Max Rating Resistive (AC1)	20A / 400VAC
Rated Insulation Voltage	690V
Impulse Withstand	6kV
Dielectric Property (50Hz)	1890V / 5sec
Max Altitude	3000m
Rated AC Control Volt	24, 110, 240, 400
Closing Voltage	0.85% - 1.1% of coil voltage
Releasing Volts	0.2% of coil voltage
Coil Consumption	≤ 6.5VA
Ambeint Working Temp	-5°C to 40°C
Humidity	40°C / 50%RH
Electrical Life	1000000 Operating Cycles
Mechanical Life	10000000 Operating Cycles

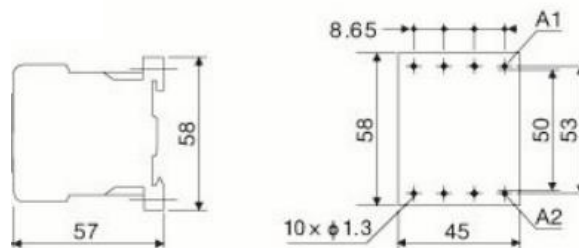

FDC-K0910



FDC-K0901

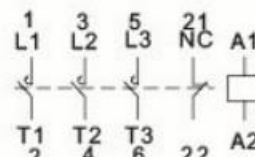

BRANCH CONTACT DETAILS

Johannesburg 010 202 3300
Germiston 011 418 9600
Cape Town 021 510 0710
Pinetown 031 700 4215
Riverhorse 031 492 4800

NATIONAL CALL CENTRE

Sales 010 202 3400
Technical 010 202 3500

www.acdc.co.za