


Product SPECIFICATION SHEET



FF-80EFM

The side-mounted float LEVEL switch (FF-series) by Finetek, is manufactured specifically for horizontal mounting on tanks or vessels. They work well as high or low level controls.

1. Both Micro-switch types and Reed Switches are available as contacts. The MicroSwitch type is usable at temperatures of up to 100°C, whereas the ReedSwitch type can handle up to 200°C.

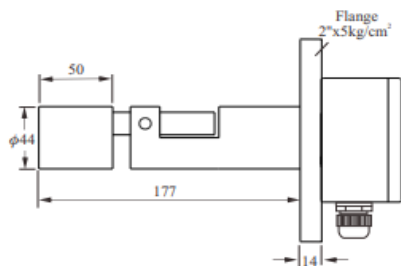

Description	Type
Mounting	FF-80EFM
Thread Size	Flange
Length Lead Wire	2" x 5Kg/cm ²
Max Switching Voltage	300mm
Max Switching Current	240VAC / 200VDC
Max Carry Current	0.5A
Switch Type	1A
Max Pressure (Kg/cm ²)	Reed Switch N.O.
Operating Temperature	10
Material	-10°C to 80°C
Suitable Specific Gravity	Polypropylene (PP)
Resistant to	0.6g/cm ³
Protection Class	Corrosive Liquids i.e. Acids, Sea Water etc
	IP65

BRANCH CONTACT DETAILS

Johannesburg 010 202 3300
Germiston 011 418 9600
Cape Town 021 510 0710
Pinetown 031 700 4215
Riverhorse 031 492 4800

NATIONAL CALL CENTRE

Sales 010 202 3400
Technical 010 202 3500

www.acdc.co.za