



FK6622

Cabinet
Climate Control



Certification	Material	Retardent Rating	IP rating
CE UL RoHS	ABS	UL94-V2	IP43

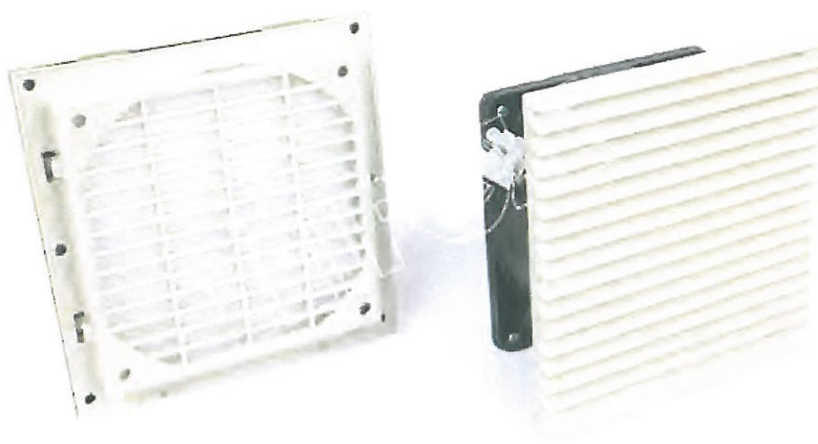


Available colors: RAL7035
RAL7032


Fans and filters
FK 6622....




Fans and filters
FK 6622.230




Exit filter
FK 6622.300



Drawing
FK 6622....



Performance
FK 6622....



Technical data

Model	FK6622.230	FK6622.115	FK6622.024
Standard fan	F2E-120S-230	F2E-120S-115	SP1203824H
Rated voltage (V / Hz)	230/50/60	115/50/60	24(DC)
Air flow, free blowing	55/66m³/h		
Air flow With export filters	1x FK6622.300: 43/50m³/h 2x FK6622.300: 48/55m³/h		
Axial Fan	Automatically shield pole motor		DC Motor
Rated current (A)	0.14/0.12	0.24/0.23	0.30
Power (W)	19/20	12/10	3.5
Noise level (dB)	46/49		
Operating temperature range	-10°C to +55°C		
Exit filter	FK6622.300		
Remarks	Special voltage needs can call the inquiry of the Company		