


Product SPECIFICATION SHEET



FKL6623

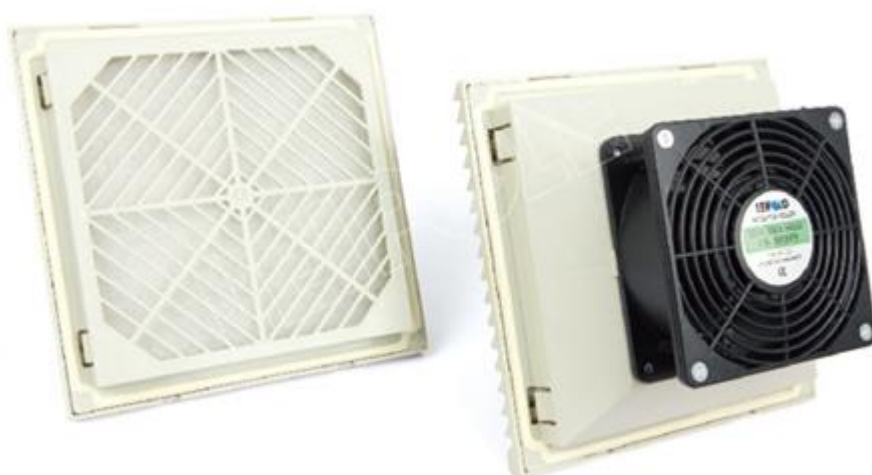



Available colors: RAL7035 
RAL7032 

Fans and filters
FKL 6623....

Fans and filters
FKL 6623.230

Exit filter
FKL 6623.300

Drawing
FKL 6623....



Technical data

Model	FKL6623.230	FKL6623.115	FKL6623.024
Available colors	RAL7035/RAL7032		
Order number	2013.009/2013.030	2013.010/2013.031	2013.011/2013.032
Standard fan	F2E-120S-230	F2E-120S-115	F2E-120S-24
Rated voltage (V / Hz)	230/50/60	115/50/60	24(DC)
Air flow, free blowing	105/120m³/h		
Air flow With export filters	1xFKL6623.300:71/82m³/h 2xFKL6623.300:85/98m³/h		
Axial Fan	Automatically shield pole motor		DC Motor
Rated current (A)	0.12/0.10	0.24/0.23	0.30
Power (W)	19/14	18/15	3.5
Noise level (dB)	43/50		
Operating temperature range	-10°C to +55°C		
Exit filter	FKL6623.300 RAL7035(2013.012)/RAL7032(2013.033)		
Remarks	Special voltage needs can call the inquiry of the Company		

Performance FKL 6623....

