

# FLOAT SWITCH

## SPECIFICATION SHEET

Direct Service • Dynamic Solutions

**ACDC**  
DYNAMICS  
[www.acdc.co.za](http://www.acdc.co.za)



FLO-1 & FLO-2


Can be used in all applications where accurate control of water level is required.

### TECHNICAL SPECIFICATIONS

Micro Switch	10(8)A 250V ~ 10(4)A 280V
Switch Currency	≥ 50 000 Switch Workings Tested by VDE Spectalisation
Protective Connection	T70U
Protection	Waterproof
Max. Temperature	70°C
Working Temperature	Max. 1 Bar
Circuitbreaking Capacity	250V, 1kW

### GENERAL SPECIFICATIONS

Power Supply	220V 50Hz
Ambient Temperature	-30°C ~ +80°C
Power Consumption	<1.5kW
Output Making Capacity	220V, 4A

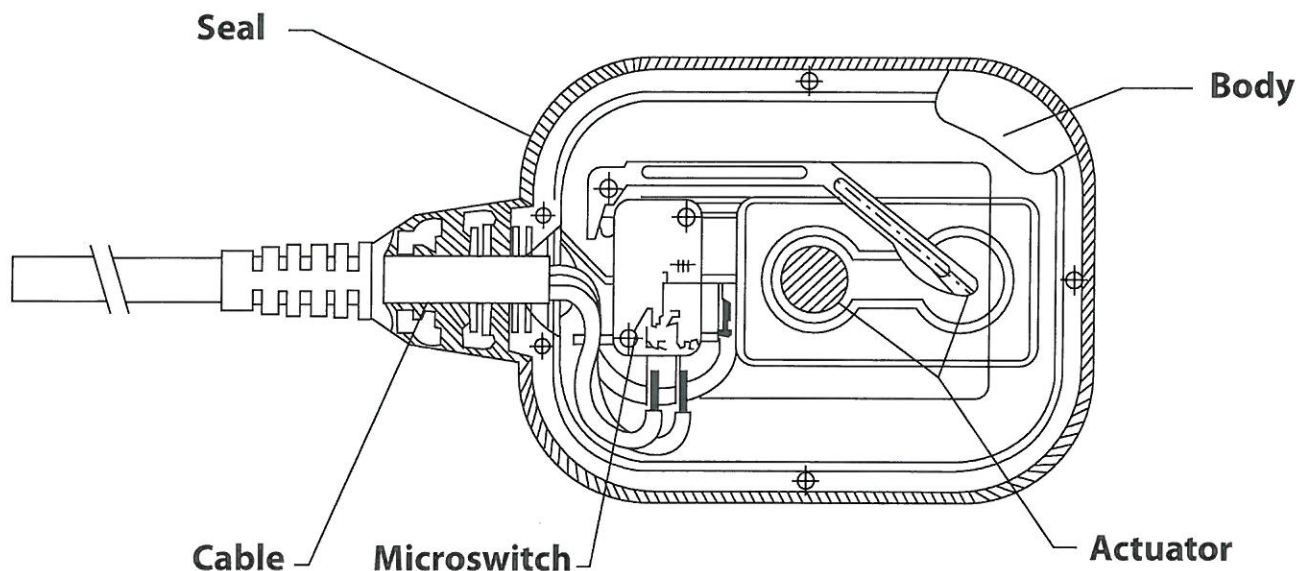

### BRANCH CONTACT DETAILS

Johannesburg: 010 202 3300  
Cape Town: 021 510 0710  
Pinetown: 031 700 4215  
Germiston: 011 418 9600  
Riverhorse: 031 492 4800



<http://www.acdc.co.za>

### NATIONAL CALL CENTRE

Sales 010 202 3400  
Technical 010 202 3500

[www.acdc.co.za](http://www.acdc.co.za)