






Product SPECIFICATION SHEET

ACDC
DYNAMICS
www.acdc.co.za

G-100 7M

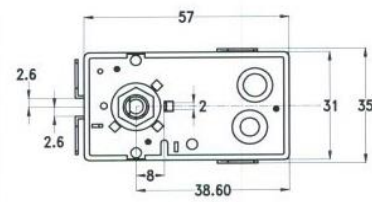

4 ARGENTED FASTONS 6.35X0.8

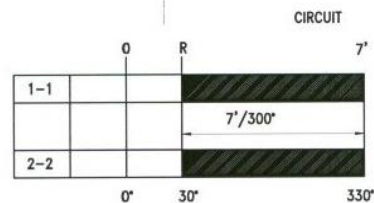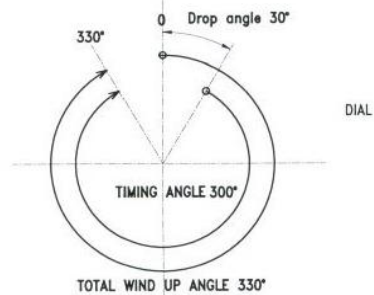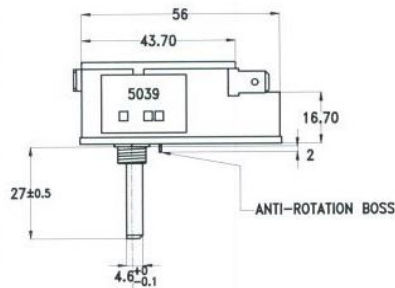

ELECTRICAL CHARACTERISTICS

standard switch : CEE 24
Rated amperage : 16(4) A
Rated voltage : 250 V
Type of current : Vac
Switch configuration: DPST
Switch for appliance classe II
Number of electrical operations : 10 000
connections terminal : 6.35 x 0.8

THERMAL CHARACTERISTICS

Maximum temperature of use : 125 °C

MARKING ON BACK CASE

Type G Mi5
16(4)A 250V 10(2)A 380V
T= 125°C
Identification of terminals

MECHANICAL CHARACTERISTICS

Winding torque : mini 0.8 maxi 2.5 daNcm
Return torque to zero position: 0.8 to 3 daNcm

timing : 7 minutes
timing range : ±10%

Residual operating torque : 0.1 daNcm
Torque of manual position : -

APPROVALS

UL - ENEC10 VDE

13A 120V AC RESISTIVE
4A 125V AC INDUCTIVE

MARKING on the sticker Label

Label of the timer : 4 numbers
week of production : 1 letter
Year of production : 2 numbers

BRANCH CONTACT DETAILS

Johannesburg 010 202 3300
Germiston 011 418 9600
Cape Town 021 510 0710
Pinetown 031 700 4215
Riverhorse 031 492 4800

NATIONAL CALL CENTRE

Sales 010 202 3400
Technical 010 202 3500
www.acdc.co.za