




A product range comprising industrial-type socket-outlets conforming to IEC 60309 Standard, with rotary switch mechanical interlock for individual or group applications on modular bases. The robustness of the products and their resistance to the main chemical and atmospheric agents, together with the high IP66 degree of protection, mean they can be installed in tough environments with critical atmospheric, chemical and mechanical (accidental impact) conditions.

Colour	Blue	Rated current (A)	63
IP degree	IP66	No. of poles	3P+N+E
Shock resistance	> IK10	Reference h	9
Rated voltage	200.0 - 250.0 V	Type	Vertical
Frequency	50/60 Hz	Type of use	Heavy duty
Protection	NO (SBF)	With back-mounting box	Yes
Operating temperature	-25 +40 °C	Electrocod	2222
Glow wire test	850 °C	Thermo-pressure with ball	80 °C

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Not resistant	Limited resistance	Not resistant	Limited resistance	Resistant	Resistant	Limited resistance	Resistant	Resistant	Resistant

DIMENSIONAL

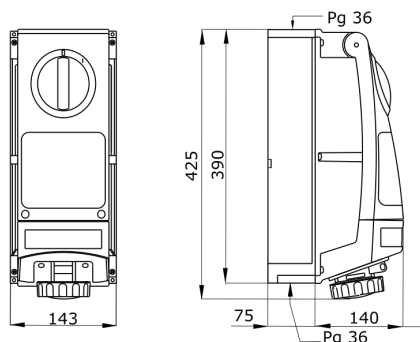


TECHNICAL SYMBOLOGY



IP66



> IK10



INSTALLATION



850 °C



TP 80°C

EN 60695-10-2

STANDARDS/APPROVALS

