Product Data Sheet

GW90246


90 MCB Range



Description	COMPACT MINIATURE CIRCUIT BREAKER
Code	MTC 60
No. of poles	2P
No. modules	1
Rated current	10 A
Curve	C
Rated voltage	230 V

Standard	EN 60898, EN 60947-2	**Rated frequency (Hz)**	50/60 Hz
Breaking capacity EN 60898 230V (Icn)	6.000 A	**Breaking capacity EN 61009 (Ics)**	1 x Icn
Breaking capacity EN 60947-2 230V (Icu)	7,5 kA	**Breaking capacity EN 60947-2 (Ics)**	100% Icu
Insulation voltage	500 V	**Rated impulse withstand voltage**	4 kV
Minimum operating voltage	12V ac/dc	**Maximum operating voltage**	440V AC / 220V DC
Electrical endurance	10000	**Mechanical endurance**	20.000
Section rigid cable	<=1x16 - <=1x10+1x6 mm²	**Section flexible cable**	<=1x10 - <=2x6 mm²
Rated tightening torque	1.2 Nm	**Operating temperature**	-25 +60 °C
Stocking temperature	-40 +70 °C	**Electrocod**	1411

DIMENSIONAL

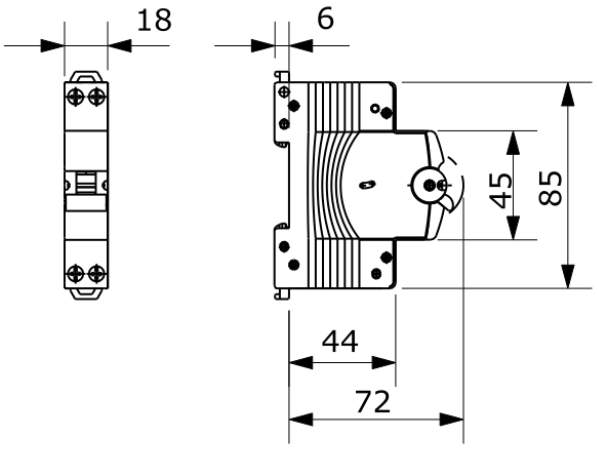

STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 24/02/2017

Data, measures, designs and pictures are shown only as informativ purposes, and could be changed without previous notice