Product Data Sheet

GW94547

90 RCD Range

Description	RESIDUAL CURRENT DEVICE
Code	BD
No. of poles	3P
No. modules	3.5
Rated current	63 A
Rated residual operating current	30 mA
Type	A
Rated voltage	400 V

Standard	EN 61009-1 app. G	**Rated frequency (Hz)**	50Hz
Insulation voltage	500 V	**Rated impulse withstand voltage**	4 kV
Overvoltage category	III	**Level of immunity (8/20 s)**	250 A
Section rigid cable	Max 35 mm²	**Section flexible cable**	Max 35 mm²
Operating temperature	-25 +40 °C	**Stocking temperature**	-40 +70 °C
Rated tightening torque	2 Nm		

DIMENSIONAL

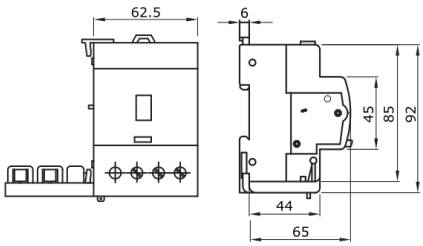

WIRING DIAGRAM



STANDARDS/APPROVALS