


Product SPECIFICATION SHEET

KS-BNC



- ▲ KS-BNC series are designed for protection of coaxial systems, such as video surveillance systems, cable television systems, etc.
- ▲ Products are designed and manufactured by the principle of current limiting, voltage clamping & stabilizing
- ▲ Low insertion loss
- ▲ Low residual voltage
- ▲ Fast response, long lifetime even in adverse conditions

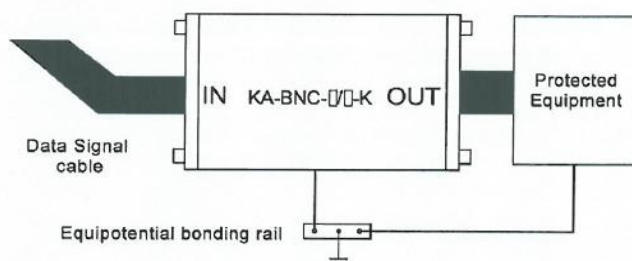

Technical Indicators:

Parameter Value	Technical Parameters	Operating Voltage (V)	Adapt Transmission Rate (bit/s)	Insertion Loss (dB)	Nominal Discharge Current 8/20 μ s (kA)	Residual Voltage 10/700 μ s	Interface Port Type	Outer Dimension L*W*H (mm)
Model No.								
KS-BNC-10/3-5		5	10M	≤ 0.5	3	$\leq 35V$	BNC (75 Ω)	42*25*25
KS-BNC-10/3-12		12	10M	≤ 0.5	3	$\leq 45V$	BNC (75 Ω)	42*25*25

BRANCH CONTACT DETAILS

Johannesburg 010 202 3300
Germiston 011 418 9600
Cape Town 021 510 0710
Pinetown 031 700 4215
Riverhorse 031 492 4800

NATIONAL CALL CENTRE

Sales 010 202 3400
Technical 010 202 3500

www.acdc.co.za