

15A MAINS PLUG


LP-600



SURGE PLUGTOP- LP600(M-10S)

- ◆ HIGH SURGE HANDLING CAPACITY
- ◆ ECONOMICAL SECONDARY PROTECTION
- ◆ DIFFERENTIAL AND COMMON MODE PROTECTION
- ◆ THERMAL AND OVERCURRENT FUSING
- ◆ PROTECTION BETWEEN L-N, L-E AND N-E PLUS WIRING CHECK

Rated Voltage	230V/50Hz
Unput Connectors	16A 3-pin Plug
Max continuous current	16A
Max Surge Current	8KA L-N, L-E, N-E
Dimensions	57X50.1X34.5
Temperature Range	-10°C to 70°C
Fusing	Integrated 104°C thermal and 16A over current fusing
MAX Continuous operating	275VAC

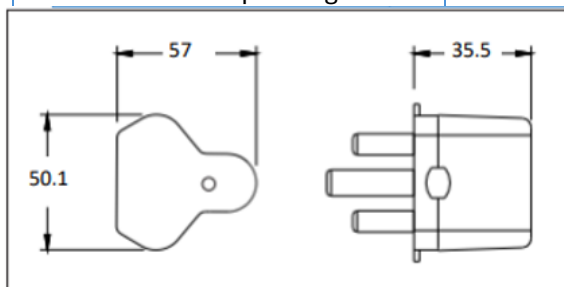

Surge plugs are used for the secondary protection of computers, video equipment, TV, alarms and other electronic equipment. They are available in the dedicated 16A round pin.

These plugs are fitted with an overcurrent and thermal fuse. In the rare event of varistor failure, the varistors are disconnected from the mains supply, preventing any dangerous temperature rise. The fault indication LED which is normally lit will go OFF to indicate the faulty protection has been disconnected. Mains power will still be available to the

BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

NATIONAL CALL CENTRE

Sales 010 202 3400
Technical 010 202 3500

www.acdc.co.za