

Product SPECIFICATION SHEET



MISTI T4-25MA, 35MA, 55MA



Application

Home pressurisation, garden irrigation, and all installations where clean water pressure is required. i.e. boreholes, open wells, lakes etc. Supplied c/w float switch for automatic control of pump based on water levels


Materials

Pump Body	Stainless Steel
Discharge	Stainless Steel
Impeller	Noryl / Glass loaded Polymers
Diffusers	Noryl / Glass loaded Polymers
Mechanical Seal	Ceramic / Graphite
Shaft	Stainless Steel

Motor

Insulation	Asynchronous 2 pole induction motor
Protection	Class B
	IPX8

Single phase with capacitor and built-in thermal protector, continuous rated

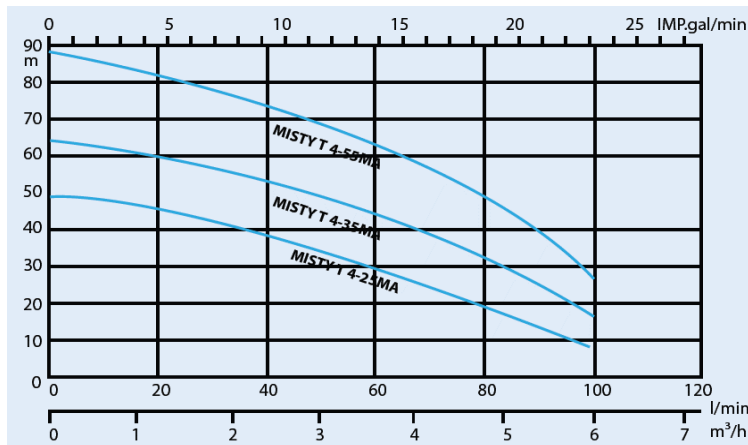

CODE	Voltage	Power		Amps	Max Head (m)	Max Flow (l/min)	Outlet (Inch)
		KW	HP				
MISTI T4-25MA	230VAC	0.75	1	3.4	50	100	1¼
MISTI T4-35MA	230VAC	0.8	1.25	6.5	65	100	1¼
MISTI T4-55MA	230VAC	1.3	1.75	7.4	85	100	1¼

BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

NATIONAL CALL CENTRE

Sales	010 202 3400
Technical	010 202 3500

www.acdc.co.za