


Product SPECIFICATION SHEET



MP-T3000D-EX9C3L2

NO.: SF001944.0

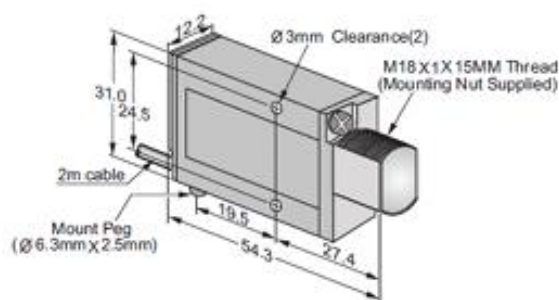

Unit: mm



Type	MP-T3000D-EX9C3L2
Sensing distance	3 m
Light source	Infrared
Switching frequency	-
Switching hysteresis	-
Operating voltage	10-30 V DC
Voltage drop	-
Max load current	-
No load current	≤25 mA
Leakage current	-
Short circuit protection	No
Reverse polarity protection	Yes
Output mode	-
Output indication	Red LED
Mechanical specifications	PA66
Protection classification	IP67
Operating temperature	-20°C -70°C
EMC	EN 60947-5-2:2007/A1:2012
Shock	IEC 60947-5-2, part 7.4.1
Vibration	IEC 60947-5-2, part 7.4.2
Connection	PVC Cable, grey 2 m
Cable stranding	42 x 0.1 x 3C

