PITBUL-N-LED

IP 65 / Ex ZONE 2/22




IK10 + 20J

FTZÚ 17 ATEX 0129X

CE | EMC | EAC | EVG | EVG DIMM | 220-240 V 50-60 Hz | 220-240 V 0 Hz | IK 10 | LED | 5 years Warranty | Ex | ta -20°C min

Application: Dustproof lighting fixture PITBUL-N-LED with splash water resistance designed for lighting of areas with danger of explosion.The lighting fixture is certified by FTZU Ostrava-Radvanice (certificate type FTZU 17 ATEX 0129X).
Ballast: EP – electronic 220-240 V, 50/60 Hz, 220 – 240 V, 0 Hz DC
Light source: LED, 4000K, CRI +80, MacAdam3
Housing: White painted steel sheet RAL 9016
Diffuser: Opal hardened safety glass
Fastening: Direct surface munting by means of M8 screws, suspension via suspending brackets, recessed mounting via the frame, ceiling mounting via set of ceiling brackets, pole mounting via set of pole brackets, wall mounting via set of adjustable brackets.
Connection: Screwless three-pole terminal block, maximum diameter of wires 2.5 mm2
Standard equipment: 1pc EX plastic cable gland M20x1,5 for diameter of cable 7-12mm, 1pc EX plastic sealing plug
Calculated lifetime – LED modules: L80B10 ta35 – 70 000h, L70B10 ta35 – 100 000h


PITBUL-N-LED, MULTIPITBUL-N-LED, PITBUL-N-LED-Em
Ex II 3G Ex nR IIC T6 Gc
Ex II 3D Ex tc IIIC T63°C Dc

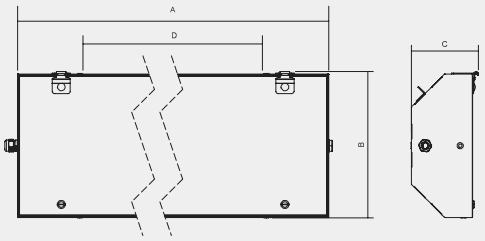

Order number	Name	Lighting fixture luminous flux (lm)	Power input (W)	Rated power output (lm/W)	Ta max (°C)	Dimensions of lighting fixture A x B x C (mm)	Mounting spacing D (mm)	Weight (kg)
053790	PITBUL-N-LED-OP-5000-218-4K	4470	35	128	65	703x310x142	450	9,1
053791	PITBUL-N-LED-OP-10000-236-4K	8940	70	128	55	1313x310x142	800	13,8
053792	PITBUL-N-LED-OP-15000-258-4K	13410	104	129	55	1613x310x142	1100	16,6
053793	PITBUL-N-LED-OP-10000-418-4K	8899	70	127	55	703x369x142	450	8,9
053794	PITBUL-N-LED-OP-18300-436-4K	15895	121	131	50	1313x369x142	800	16,1
053795	PITBUL-N-LED-OP-29000-458-4K	24845	195	127	45	1613x369x142	1100	19,6

Tolerance of luminous flux and power input of the lighting fixture +/- 10%

PITBUL-N-LED



C0-C180 ---- C90-C270