



Q1CP*M Series



Application

Domestic clean water / liquid drainage, max particulate size 5mm Complete with float switch

Materials

Pump body: Impeller: Seal: Plastic Plastic


Mechanical (Q1CP-250M Lip Seal)

Motor Shaft: Stainless Steel

Motor Single phase induction motor

Insulation: Class B Protection: Rating: IPX8

None Continuous

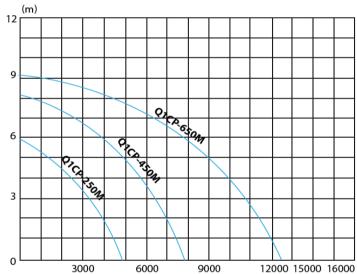

| Code | Voltage | Power | | Amno | Max | Max Flow | Outlet |
|-----------|---------|-------|------|------|---------|-------------|--------------|
| | | KW | HP | Amps | Head(m) | (l/min) | (mm) |
| Q1CP-250M | 230VAC | 0.25 | 0.33 | 1.1 | 6 | 83 | 1"/11/4/11/2 |
| Q1CP-450M | 230VAC | 0.45 | 0.6 | 1.6 | 8 | 133 | 1"/11/4/11/2 |
| Q1CP-650M | 230VAC | 0.65 | 0.87 | 2.5 | 9 | 208 | 1"/11/4/11/2 |

BRANCH CONTACT DETAILS

Johannesburg Germiston Cape Town Pinetown Riverhorse 010 202 3300 011 418 9600 021 510 0710 031 700 4215 031 492 4800

010 202 3400 010 202 3400

www.acdc.co.za