

# Product SPECIFICATION SHEET





## RCO-1218D & RCO-1222D

- The cam switches shown in this catalogue have been constructed in accordance with the specifications contained in the CEI 23-11, CEI 17-11, IEC 408, CEE 24, VDE 0660 T 107.
- The contacts are electroplated in Nickel / Silver and the contact angle is 45°
- The voltage referring to the insulation is 660V (690V for switchboard version) with AC1 nominal current = 12A
- The mechanical life is 1.5 million operations with running temperature. Running temperature ranging from -20°C to + 60°C.
- Protection rating is IP40
- All rotating parts are completely isolated from parts carrying voltage




### VOLTMETER SELECTOR SWITCH

RCO-1218D (7 Position 3 phase + N)



### AMMETER SELECTOR SWITCH

RCO-1222D (Single Pole 3 C/T's)

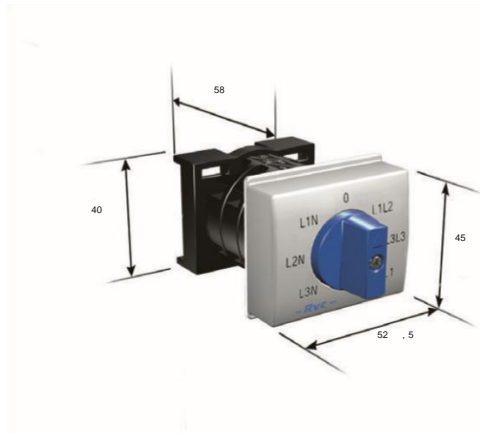

#### BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

#### NATIONAL CALL CENTRE

Sales 010 202 3400  
 Technical 010 202 3500

[www.acdc.co.za](http://www.acdc.co.za)