

Direct Service • Dynamic Solutions

# PRODUCT SPECIFICATION SHEET



### LM / LMF series

型式 MODEL	電壓 Voltage	消耗電力 Power Consumption					燈泡 BULB	閃光數 FLASH RATE	
		1 FL	2 FL	3 FL	4 FL	5 FL			
定光式 STEADY-BURN	LM-12	DC/AC 12V	0.8A	1.6A	2.4A	3.2A	4.0A	12V.10W	約 70次/分
	LM-24	DC/AC 24V	0.4A	0.8A	1.2A	1.6A	2.0A	24V.10W	
	LM-110	AC 120V	90mA	180mA	270mA	360mA	450mA	120V.10W	
	LM-220	AC 240V	45mA	90mA	135mA	180mA	225mA	240V.10W	
閃光式 FLASHING	LMF-12	DC 12V	0.8A	1.6A	2.4A	3.2A	4.0A	12V.10W	
	LMF-24	DC 24V	0.4A	0.8A	1.2A	1.6A	2.0A	24V.10W	
	LMF-110	AC 120V	90mA	180mA	270mA	360mA	450mA	120V.10W	
	LMF-220	AC 240V	45mA	90mA	135mA	180mA	225mA	240V.10W	

### LMD/LMDF series Compound LED Bulb

型式 MODEL	電壓 Voltage	消耗電力 Power Consumption					燈泡 BULB	閃光數 FLASH RATE	
		1 FL	2 FL	3 FL	4 FL	5 FL			
定光式 STEADY-BURN	LMD-12	DC/AC 12V	0.1A	0.2A	0.3A	0.4A	0.5A	12V. ①	約 70次/分
	LMD-24	DC/AC 24V	0.04A	0.08A	0.12A	0.16A	0.2A	24V. ①	
	LMD-110	AC 120V	20mA	40mA	60mA	80mA	100mA	120V. ①	
	LMD-220	AC 240V	20mA	40mA	60mA	80mA	100mA	240V. ①	
閃光式 FLASHING	LMDF-12	DC 12V	0.1A	0.2A	0.3A	0.4A	0.5A	12V. ①	
	LMDF-24	DC 24V	0.04A	0.08A	0.12A	0.16A	0.2A	24V. ①	
	LMDF-110	AC 120V	20mA	40mA	60mA	80mA	100mA	120V. ①	
	LMDF-220	AC 240V	20mA	40mA	60mA	80mA	100mA	240V. ①	

#### Usage:

Suitable for automated plant and all kinds of automatized machines: robot, textile machines, injection molding machines, plastic extruding machines, etc. To indicate assorted abnormal conditions in plant equipments or automatic production lines.

Suitable for game machines: pachinko etc.


#### FEATURES:

1. Domes for the assorted colors: available in red, yellow, blue, green and clear.
2. Easy to repair: only to loose a screw for replacing the lenses or bulbs.
3. With the especially refractive lens: it can enlarge the light source and spark the beautiful bright & colored glare.
4. Only installing one tower light: it can show the different signals for the production flow of machine.
5. Two kinds of indications: by the styles of steady-burn (LM) or flashing (LMF).
6. With elegant design: can be clearly seen the efficiency from any directions.

Remarks: LMF type operating on DC 12V or 24V, please connect with switch or relay.


\*① = BA15D

Remarks: LMD/LMDF type operating on DC 12V or 24V, please connect with switch or relay.

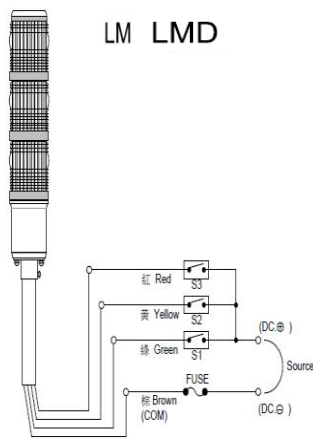


External contact/toggle switch, relay or limit switch  
S .....外部接點 (上下開關、繼電器、限制開關)

( Optional Accessory )

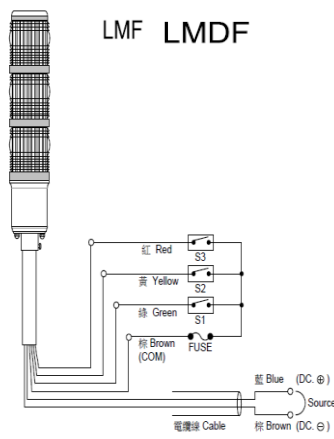

External contact/toggle switch, relay or limit switch  
S .....外部接點 (上下開關、繼電器、限制開關)  
註：不能接用無接點繼電器SSR Don't connect with SSR

( Standard Accessory )

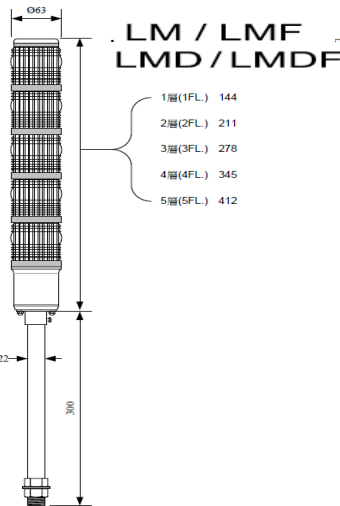

[ Mounting Bracket ]  
尺寸 SIZE (m / m)

