


Product SPECIFICATION SHEET


STB Series, BM933, BM935

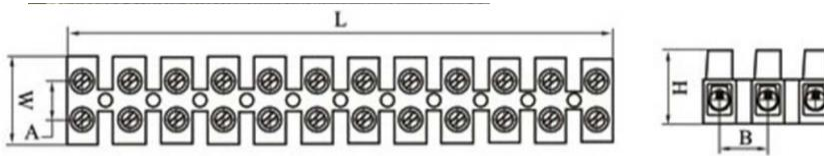

Code	L	W	H	A	B	Volt	Amp	Wire Size mm ²
STB02	90	15.5	11.5	6	7.5	380	3	2.5 - 4.0
STB04	104	15.5	11.5	6	9	380	6	4.0 - 6.0
STB06	115	18.5	13	6.5	10	380	10	6.0 - 10.0
STB10	122	19.5	14	7	11	380	16	10.00 - 12.0
STB16	161	21.5	15	7	13.5	380	30	16.0
STB25	168	24.5	21.5	7.5	14.5	380	60	25.0

Code	L	W	H	A	B	Volt	Amp	Wire Size mm ²
STB02-BK/2	90	15.5	11.5	6	7.5	380	3	2.5 - 4.0
STB04-BK/2	104	15.5	11.5	6	9	380	6	4.0 - 6.0
STB10-BK/2	122	19.5	14	7	11	380	16	10.00 - 12.0
STB16-BK/1	161	21.5	15	7	13.5	380	30	16.0

ACCESSORIES · PROTECTION COVERS · FROM 3 TO 5 WAYS · FOR M093 SERIES



MATERIAL: polyamide (PA 6.6), natural color UL94 V2
MATERIAL (GF VERSIONS): natural PA 6.6 and fiberglass
OPERATING TEMPERATURE: 110 °C max
OPERATING TEMPERATURE (GF VERSIONS): 150 °C max

ASSEMBLY:
 Snap-on on plates with thickness from 0.6 to 1.2 mm
 or fasten via screw through terminal block and base.
 Snap-on or fasten via M3 screw through cover and terminal block.

Code	Material	Cable with conductors	# ways
			L1
933	Nylon	3x0,75/1,5	2-3 30
935	Nylon		4-5 50

BRANCH CONTACT DETAILS

Johannesburg 010 202 3300
 Germiston 011 418 9600
 Cape Town 021 510 0710
 Pinetown 031 700 4215
 Riverhorse 031 492 4800

NATIONAL CALL CENTRE

Sales 010 202 3400
 Technical 010 202 3500
www.acdc.co.za