Product SPECIFICATION SHEET

ACDC DYNAMICS
www.acdc.co.za

# TCDP

**Purpose**
These contactors are used for the control of Motors, Power supplies, Heating Elements, and compressors


**Enviroment**
Max operating altitude is 2000 meters above see level. Operating temperature -5ºC to 55ºC, Hhumidity 45 to 85% RH


**Coil Data**
Voltages available 24VAC, 110VAC, 240VAC, 400VAC
Normal VA: Inrush 65VA, Sealed 7.5VA
Insulation resistance 100MΩ min




**Operational Life**
mechanical ±200,000 operations
Electrical ± 2,000,000 operations

**Contacts**
**2 Pole, Screw terminals**

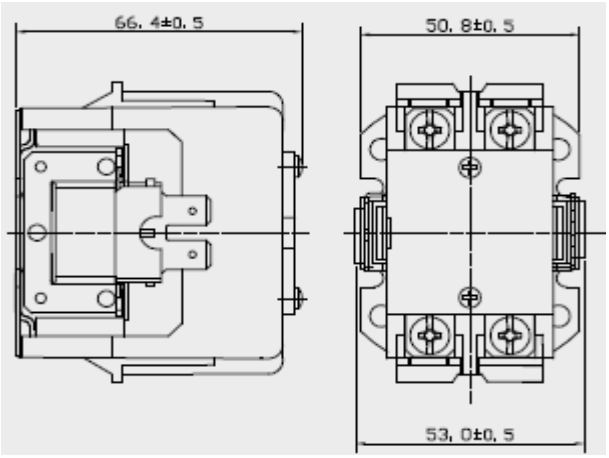

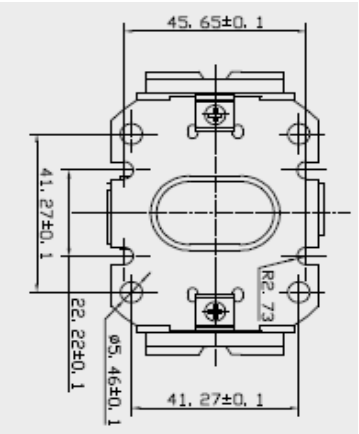
**BRANCH CONTACT DETAILS**

| | |
|---|---|
| Johannesburg | 010 202 3300 |
| Germiston | 011 418 9600 |
| Cape Town | 021 510 0710 |
| Pinetown | 031 700 4215 |
| Riverhorse | 031 492 4800 |

**NATIONAL CALL CENTRE**
Sales 010 202 3400
Technical 010 202 3500
**www.acdc.co.za**