
Product SPECIFICATION SHEET


ACDC DYNAMICS
www.acdc.co.za


TK-30-series – 12VDC/24VDC

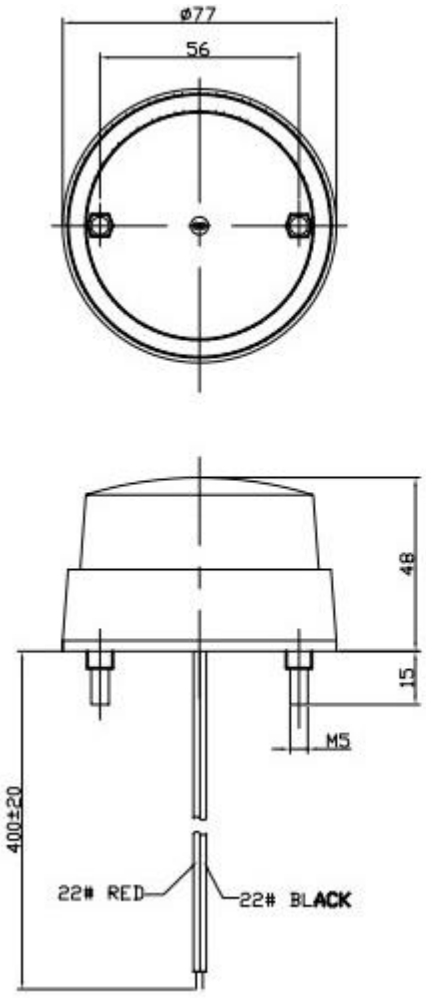

Specification (Test Condition, 25℃)

1.Materials/Color ..... Base：ABS/Black
..... Lens：Acrylic/Amber、Blue、Clear、Red
2.Rated Voltage..... 12VDC
3.Operating Voltage..... 8-15VDC
4.Max.Rated Current..... 150mA/12VDC
5.Flash Rate..... 105±20 Per Minute
6.Operating Life ..... 200 Hours Continuous Duty At 12VDC
7. Operating Temperature Range ..... -20 ~ +60℃
8. Wires Connection ..... Red +12VDC
..... Black GND
9. Weight ..... 90±5 g

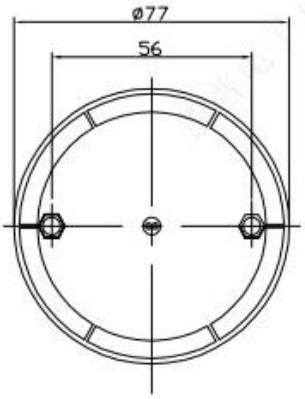

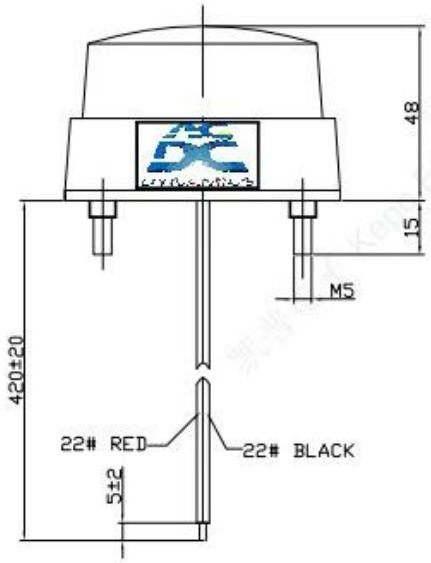

Specification (Test Condition, 25℃

1.Materials/Color ..... Base：ABS/Black
..... Lens：Acrylic/Amber、Blue、Clear、Red
2.Rated Voltage..... 24VDC
3.Operating Voltage..... 16--27VDC
4.Max.Rated Current..... 150mA/24VDC
5.Flash Rate..... 100±20 Per Minute
6.Operating Life ..... 500 Hours Continuous Duty At 24VDC
7. Operating Temperature Range ..... -20～+60℃
8. Wires Connection ..... Red +24VDC
..... Black GND
9. Weight ..... 90±5 g