

Product SPECIFICATION SHEET




TM2P, TMP3 & TM4P Series Contactors




Operating Conditions

• Ambient Temperature	- 25°C to 40°C
• Mounting	Stationary / Vertical
• Ingress Protection	IP20

2 POLE




3 POLE




4 POLE

(Note: Also available in 2 x NO + 2 x NC)



Contactor version			TMP2, TMP3, TMP4		
Short-time thermal current I _t , Ah			25	40	63
Rated insulation voltage U _i , V			500	500	500
Rated impulse voltage U _{imp} , kV			6		
Rated power at voltage, kW, in application category	AC-1/ AC-7a (weak inductive loads)	Rated operating current I _e , A	25	40	63
		230 V	5.4	8,4	12
		400 V	16	26	40
	AC-3/ AC-7b (highly inductive loads)	Rated operating current I _e , A	9	22	30
		230 B	1,3	3,7	5
		400 B	4,5	11,3	15
Coptrol Circuit Parameters 220/240VAC 50/60Hz					

Contactor overall dimensions

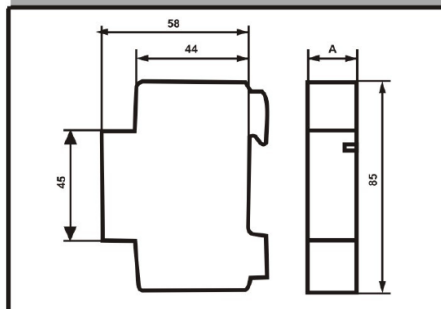

Number of modules	Width A, mm
TM2P 2 Pole	36
TM3P & 4P 3 & 4 Pole	54

BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

NATIONAL CALL CENTRE

Sales	010 202 3400
Technical	010 202 3500

www.acdc.co.za