Product SPECIFICATION SHEET

ACDC DYNAMICS
www.acdc.co.za

TSQB & TSSG Series





Scoop of supply: Pump Controller, Cable Connector, Cable for Solar Panels, Water Level Sensors,
Compared with traditional AC moters the efficiency is increased by up to 25% by the use of permanent magnets, direct current, brushless, nonsensor moters.
Ideal for areas where AC supply is non existant or conpremised by continuous outage. Can be used for the supply of drinking water, irrigation, clean water circulation / reticulation

Materials

Inlet / Outlet	**Stainless Steel**
Pump Body	**Stainless Steel**
Motor Body	**Stainless Steel**

Code	Volts (VDC)	Power	Max Flow	Mx Head	I/O Size	Controller		Required PV Panels
						Built-In	Supplied	
TSQB2.0-25-24/120	24	120W	2m³/h	25m	1" x 1"	—	Yes	80W x 2
TSQB2.2-37-36/210	36	210W	2.2m³/h	37m	1" x 1"	—	Yes	80W x 2
TSSGJ3.2-18-24/120	24	120W	3.2m³/h	18m	1" x 1"	—	Yes	80W x 2

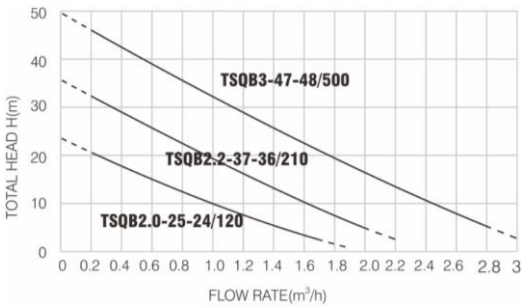

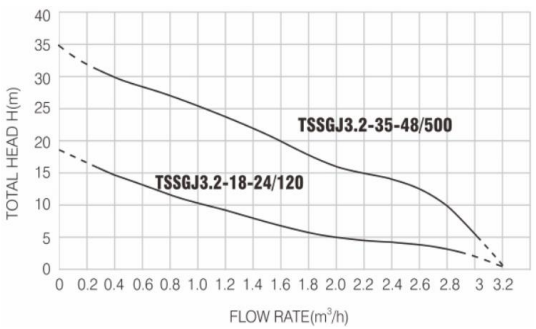

BRANCH CONTACT DETAILS

Johannesburg	010 202 3300
Germiston	011 418 9600
Cape Town	021 510 0710
Pinetown	031 700 4215
Riverhorse	031 492 4800

NATIONAL CALL CENTRE
Sales 010 202 3400
Technical 010 202 3500
www.acdc.co.za